

Fujikura 70S



EVOLUTION!

World's quickest splicing 7sec. / tube-heating 14sec.



Single Fiber Fusion Splicer
Fujikura 70S
Core-to-Core alignment, Dual-axis observation system

Automated wind-protector.



- World's quickest splicing 7sec. / tube-heating 14sec.
- Minimal manual operation. Splice in 4 steps.
- Multi-functional carrying case with integrated work station.
- Absolute robustness.



SPECIFICATIONS

| | |
|--|---|
| Applicable fibers | Single / SMF (G.652/657), MMF (G.651), DSF (G.653), NZDSF (G.655) |
| Cladding dia. | 80-150µm |
| Cleave length | 5mm to 16mm with sheath clamp |
| Splice mode / heating mode | Total 100 splice modes / 30 heating modes |
| Splice loss | 0.02dB (SM), 0.01dB (MM), 0.04dB (DSF) and 0.04dB (NZDS) Measured by cut-back method relevant to ITU-T and IEC standards. |
| Attenuation splice function | Intentional high splice loss of 0.1dB to 15dB (0.1dB step) can be made for an in-line fixed attenuator. |
| Splice time / tube heating time | Typical 7sec with SM / Typical 14sec with FP-03 (60mm) sleeve |
| Splice result storage | Last 2000 splices |
| Viewing methods / magnification | 2 axis CMOS camera with 4.73" color LCD. X / Y (320X magnification), or both X and Y simultaneously (200X magnification) |
| Tension test | 1.96 to 2.25N |
| Applicable protection sleeve | 60mm, 40mm and Fujikura micro sleeves |
| No. of splice / heating per battery full charge | Typical 200 cycles with BTR-09 |
| Electrode life | 3000 splices |
| Size / weight | 146W x 159D x 150H (mm) / 2.7kg (including battery) |
| Operating condition | Altitude : 0 to 5,000m above sea level, Wind : 15m/sec Temperature : -10 to 50deg C, Humidity : 0 to 95%RH, non-dew |
| Resistance features*1 | Shock : 76cm (30inch) all surface drop Dust : Exposure to dust (0.1 to 500µm dia Alumina Silicate), IP5X Rain : H=10mm/hr for 10min, IPX2 |
| Other features | PC software upgrade / data management |
| Terminals | USB 2.0 (Mini-B type) connector for PC communication. 6-pin Mini-DIN connector for HJS-02 or HJS-03 power supply. |

*1: Carried out in Fujikura labs in Japan. The shock resistance, dust resistance and rain resistance test do not guarantee that the product will not be damaged under these conditions.

ACCESSORIES

| Description | Model No. |
|-------------------------------------|---|
| High precision single fiber cleaver | CT-05 (for single fiber) |
| High precision fiber cleaver | CT-30 series (for single to 12 ribbon fibers) |
| Primary coat stripper | PS-02 |
| Nylon jacket stripper | JS-01 |
| Thermal jacket stripper | HJS-02, HJS-03 |
| Protection sleeve | FP-03 / 03 (L=40) and FPS01series |

OPTIONAL ITEMS


| Description | Model No. | SET |
|---------------------|---|-------|
| Fiber holder | FH-60-250 (coating dia. 250µm) | 1pair |
| | FH-60-900 (coating dia. 900µm) | 1pair |
| | FH-60-DC250 (coating dia. of 250µm in drop cable) | 1pair |
| | FH-FC-20 (coating dia. of 900µm in 2.0mm Sheath dia.) | 1pc |
| | FH-FC-30 (coating dia. of 900µm in 3.0mm Sheath dia.) | 1pc |
| | FH-60-LT900 (900µm dia. loose buffer fiber) | 2pcs |
| Sheath clamp | CLAMP-S70A (included in standard package) | 1pair |
| | CLAMP-S70B (900µm dia. loose buffer fiber) | 1pair |
| Battery pack | BTR-09 (Li-ion) ² | 1pc |
| Battery charge cord | DCC-18 | 1pc |
| DC power cord | DCC-12 (for cigar-socket) | 1pc |
| | DCC-13 (with alligator clamp) | 1pc |
| Electrodes | ELCT2-20A | 1pair |

²: all senders have to obey the IATA regulation in case of Li-ion battery transportation by air.

STANDARD PACKAGE

| Description | Model No. | Q'ty |
|-----------------------|--|-------|
| Fusion splicer | 70S | 1pc |
| AC adapter | ADC-18 | 1pc |
| AC power cord | ACC-XX XX=14 (JP/US), 15 (EU), 16 (UK), 17 (AU) | 1pc |
| Carrying case | CC-30 | 1pc |
| Spare electrodes | ELCT2-20A | 1pair |
| Instruction manual CD | M-70 (Manual and PC software) | 1pc |
| Quick reference guide | Q-70S/19S-E (English) | 1pc |
| Warning and cautions | W-70-E | 1pc |
| USB cable | USB-01 | 1pc |
| Sleeve loader | SL-01 | 1pc |
| Alcohol pot | AP-01 | 1pc |
| Screw driver | SD-01 | 1pc |

STANDARD PACKAGE

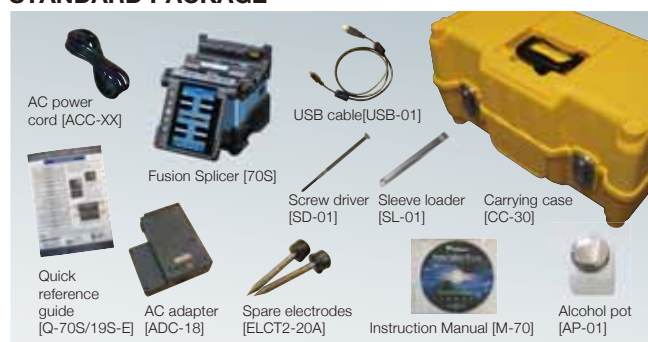

Specifications and descriptions are subject to change without prior notice.

Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan
Phone: +81-3-5606-1164 Fax: +81-3-5606-1534 <http://www.fujikura.co.jp>

Fujikura Asia Ltd.

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967
Phone: +65-6-278-8955 Fax: +65-6-278-0965 <http://www.fujikura.com.sg>

Fujikura Europe Ltd.

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, UK
Phone: +44-20-8240-2000 Fax: +44-20-8240-2010 <http://www.fujikura.co.uk>

AFL Telecommunications

260, Parkway East, Duncan, SC29334, USA
Phone: +1-800-235-3423 Fax: +1-800-926-0007 <http://www.afglobal.com>

Fujikura (China) Co., Ltd.

16th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai, 200120 CHINA
Phone: +86-21-6841-3636 FAX: +86-21-6841-2070 <http://www.fujikura.com.cn>