

AV6416 palm OTDR is the newest instrument designed for testing FTTx network. It's mainly used to measure the physical characteristics of optical fiber under test, such as the length, the transmission loss and the splice loss etc. It can also locate the faults or breaks of optical fiber. It's widely applied in the manufacture, construction and maintenance in optical fiber communication system. AV6416 palm OTDR has the most advanced technology of double-color & material integrative mould, which is novel and beautiful in appearance. AV6416 offers three wavelength and VLF in one handheld unit, especially for testing passive optical network (PON) in FTTx. In addition, it's equipped with comfortable gallus for carrying conveniently.

Description



Product Summaries

AV6416 palm OTDR is the newest instrument designed for testing FTTx network. It's mainly used to measure the physical characteristics of optical fiber under test, such as the length, the transmission loss and the splice loss etc. It can also locate the faults or breaks of optical fiber. It's widely applied in the manufacture, construction and maintenance in optical fiber communication system.

AV6416 palm OTDR has the most advanced technology of double-color & material integrative mould, which is novel and beautiful in appearance. AV6416 offers three wavelength and VLF in one handheld unit, especially for testing passive optical network (PON) in FTTx. In addition, it's equipped with comfortable gallus for carrying conveniently.


Mainly features

1. Handheld, lightweight and convenience for carrying
2. Most advanced technology of double-color & material integrative mould in trade
3. Advanced anti-reflective TFT LCD, visible clearly in field
4. 1.6m extra-short event dead zone
5. 0.25m high resolution, 65534 sampling points

6. Fast auto measurement, one-button operating
7. Double USB interfaces, supporting USB stick and direct cable download to PC via ActiveSync
8. Supporting Bellcore GR196 file format in writing or reading
9. Function of intelligent indicating of remaining capacity of battery and warning if the voltage of battery is low
10. WinCE operation system, double operating interface of Chinese and English
11. Built-in lithium battery with high capacity for over 10 hours of operating life
12. Visible fault locating (VFL)
13. Universal FC/PC, FC/SC, FC/ST connector type, it's convenient for surface cleaning
14. Unique function of updating system on-line, returning to factory is unnecessary

Extra-short event dead zone

AV6416 palm OTDR has extra-short event dead zone, which is suitable for testing short optical fiber and pigtail optical fiber.

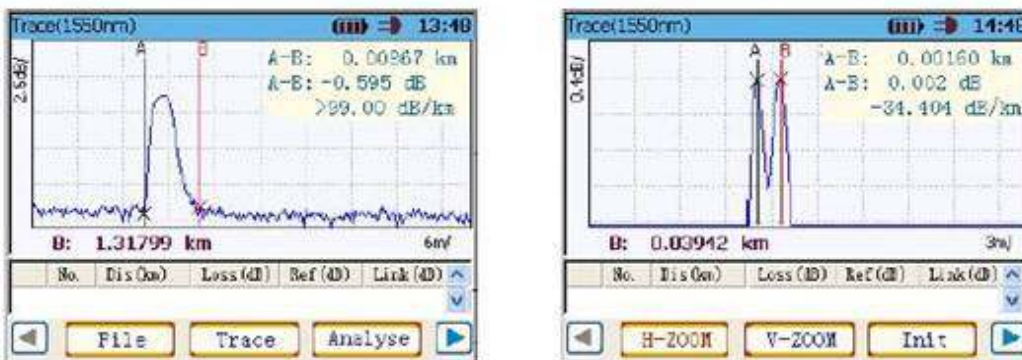


1. High-speed auto measurement

The function of auto measurement of AV6416 palm OTDR makes it unnecessary to operator to know about the further details of operating. Simply connect the fiber, press 【 Start 】 ,then the result is displayed in a few seconds, you can view the trace and event table.



2. High-speed auto analyzation

AV6416 can search and locate the events and faults in trace rapidly and precisely, and then lists all events in even table, so it's very useful to maintainers to improving efficiency and it's unnecessary to know about the relative background knowledge.

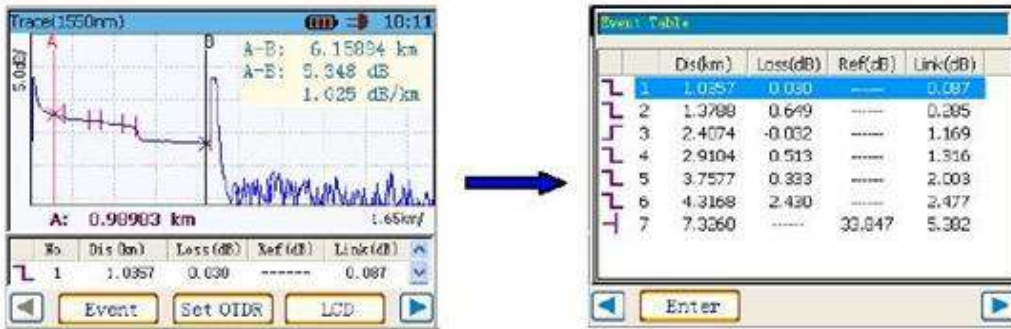

The screenshot shows a 'Data Table' window with columns: Dis (km), Loss (dB), Ref (dB), Link (dB). It contains seven rows of data.

	Dis (km)	Loss (dB)	Ref (dB)	Link (dB)
1	1.0557	0.030	-----	0.087
2	1.3788	0.649	-----	0.395
3	2.4074	-0.032	-----	1.169
4	2.9104	0.513	-----	1.316
5	3.7577	0.333	-----	2.003
6	4.3168	2.430	-----	2.477
7	7.3360	-----	39.847	5.392

Below the table is an 'Enter' button.

3. Strong file management

AV6416 offers powerful function of file management. Besides saving, browsing or deleting files to or from USB stick and built-in memory, it can be connected to laser or inkjet printer based on PCL language, and the testing report can be printed rapidly and easily. In addition, AV6416 can communicate with PC using ActiveSync via USB cable, through which the files can be translated rapidly.




File management and transmission

4. Convenient VFL

The built-in 650nm visual fault location is ideal for easily identifying bad splice, bad connector, break or macro bend.



5. Application

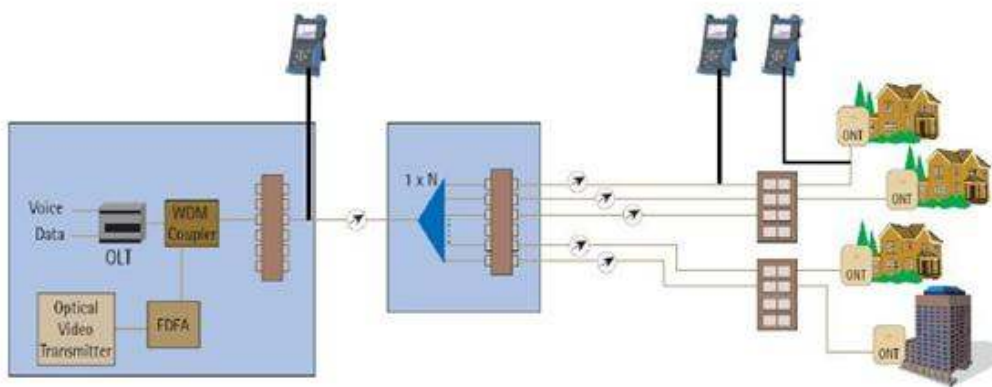

AV6416 Palm OTDR is mainly used to measure FTTx network, it provides a low cost solution for users. AV6416 offers three measuring modes: manual mode (including real time mode and average mode), auto mode and dead zone mode.

Manual measurement mode: manual mode is suitable for skilled operator who is familiar with the instrument. In this measurement mode, to get more accurate results, real-time mode or average mode can be selected if necessary.

In real-time mode, the dynamic changes of fiber chain can be detected timely, it is very useful when you need to observe the effect and process of fiber being spliced or connected.

In average measurement mode, the noise in trace can be suppressed, and the SNR (signal noise ratio) is improved, therefore, the result is more accurate. In fact, the more average times are executed, the more noise in trace is suppressed, and the longer time is spent for signal processing. In practice, the average times should be set properly according to necessity.

Auto measurement mode: the optimized measurement conditions are set automatically, it's unnecessary to operator to know about the complicated background knowledge and the further details of operating. In this mode, the more accurate results can be gained when proper average times are set, but it will increase the time of signal processing.

Dead zone mode: this mode is suitable for testing optical fiber with short distance and the optimized settings of distance range, pulse width and attenuator can be executed automatically. To get the best result, the terminal return loss should be guaranteed less than -40dB.

Specifications

Main Specifications	
Dynamic Range1	1310nm/1550nm \pm 20nm 28/26dB
Event Dead Zone	\leq 1.6m
Applicable Fiber	Single-mode
Distance Range	4, 8, 16, 32, 64, 128, 256km

Sampling Resolution	0.25, 0.5, 1, 2, 4, 8, 16m
Pulse width	10, 30, 80, 160, 320, 640, 1280, 5120, 10240ns
Sampling points	65534
Distance Measurement Accuracy	$\pm (1m + \text{sample space} + \text{measurement distance} \times 0.003\%)$
Loss threshold	0.01dB
Linearity	0.05dB/dB
Memory capacity	800 traces
Group refractive index setting	1.00000—2.00000
Display	Color LCD (touch screen)
Interface	USB, Min-USB
VFL	650nm \pm 10nm, 2mW (typical) ; CW/1Hz
Language	Simple Chinese/English
Optical Connector	FC/UPC (universal connector)
Power Supply	DC:15V—20V (3A) , (AC adapter 100~240V, 50/60Hz, 1.5A Built-in Lithium battery 4400mAh,7.4V,operating time \geq 10 hours
Dimensions	210 \times 100 \times 60 (mm)
Weight	1 kg

Note1: pulse width 10240ns, average times \geq 300, SNR=1, 23 $^{\circ}$ C \pm 2 $^{\circ}$ C;

Note2: Pulse width:10 ns, terminal reflection loss: \geq 40 dB, typical;

Note3: Low brightness, exclude measuring.

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

Haberleşme sistemlerinde **yüksek performansı yakalayın**



Telkolink GYM Bilgi Teknolojilerine ait'tir.

www.gym-tech.net

Bilgi için

bilgi@gym-tech.net

0212 3204030