


## Bare Fiber Adaptor

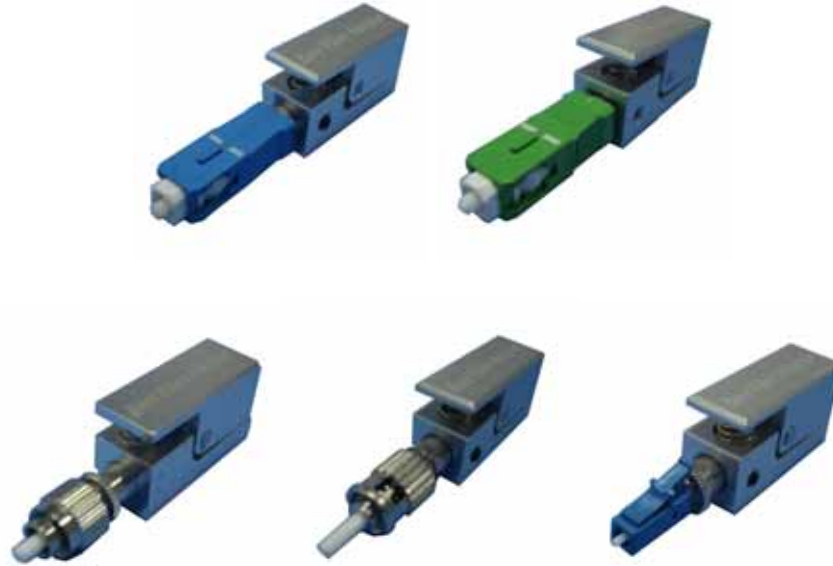

### Descriptions

SC, FC, ST, LC, Bare Fiber Adaptors can link bared optic and light source, testing equipment, light appearance etc, and the products used for test appearance and temporary conjunction between fiber optics extensively (repair fiber optic cable urgently).

### Features

- Low insertion loss
- Repeatability and exchangeability good
- Stabilize the credibility

### Applications

- Telecommunications system
- Fiber data system

### Specification:

Polish Type	Unit	PC	APC
Nominal fiber O/D	um	125±2	
Insertion Loss	dB	≤0.20	≤0.20
Return Loss	dB	≥50	≥65
Mating Durability (500Cycles)		≤0.20dB	
Temperature Stability		≤0.30dB	
Operating Temperature		-40 ~ 85	
Storage Temperature		-40 ~ 85	

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

[www.telkolink.com](http://www.telkolink.com)

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

