

IES206G-2GS-P (12/48VDC)

4 port 10/100/1000M + 2 port SFP Gigabit Unmanaged DIN-rail Industrial Ethernet switch

Feature

- Support IEEE802.3/IEEE802.3u/IEEE802.3x/IEEE802.3z store and forward
- Support 4 port 10Base-T/100Base-TX/1000 Base-TX and 2 port 1000Base-X SFP gigabit port
- Ethernet port support full/half duplex mode, MDI/MDI-X
- Support 12~48VDC power input, built-in overcurrent protection, Reverse connection protection
- Working temperature: -40°C~85°C
- No fan, low consumption, Industrial design standard
- IP40 protection grade, high strength iron shell, DIN-rail mount




Introduction

IES206G-2GS-P(12/48VDC) is a kind of industrial, unmanaged, gigabit Ethernet switch. It supports 4 port 10Base-T/100Base-TX/1000 Base-TX Ethernet port and 2 port 1000Base-X SFP fiber port, no fan, low consumption design, working function more steadily. It accords with FCC, CE standard, industrial design requirement, it can work steadily in -40 °C ~85 °C working temperature, it can provide reliable and quickly solution for your Ethernet device

Dimension and appearance

Unit (mm)

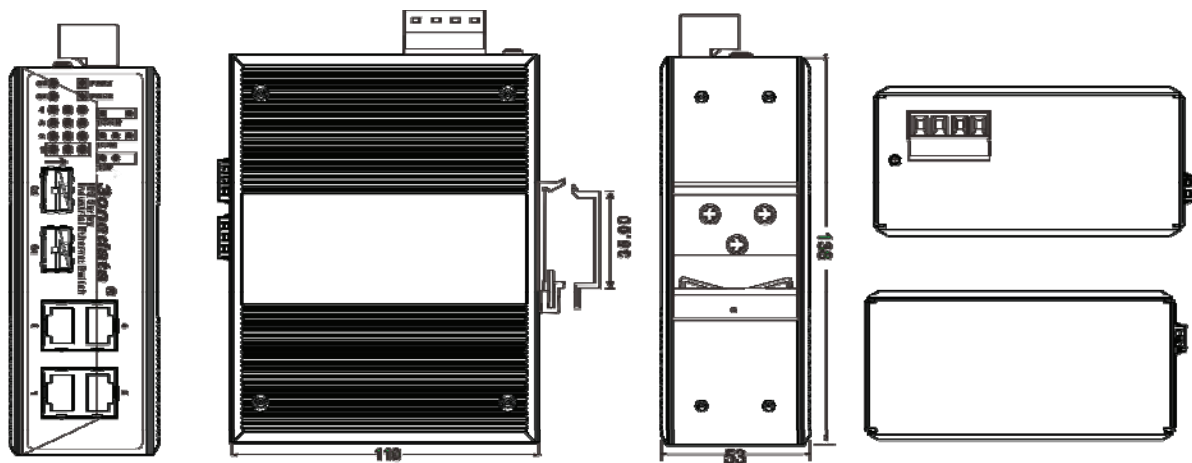

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C



Specification

Technology:

Standard: IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3z

Interface:

Gigabit SFP port: 1000Base-X, LC
 Gigabit Ethernet port: 10Base-T/ 100Base-TX/ 1000Base-TX, RJ45 port, full/half duplex mode, MDI/MDI-X

Exchange attribute:

Transfer mode: Store and forward

Bandwidth: 6G

Buffer Memory: 1Mbits

MAC address table: 499

Led indicator:

Ethernet port: 1, 2, 3, 4

Fiber port: G1, G2

Power: PWR1/PWR2

Transfer distance:

Twisted-cable: 100M(CAT5/CAT5e)

Multi-mode: 1310nm, 5Km

Single mode: 1310nm, 20Km

1310nm, 40Km

1310nm, 60Km

1550nm, 80Km

Power supply:

Power input: 24VDC (12~48VDC)

Terminal block: 4 bit 7.62mm separation distance

No-load power consumption: 1.440W@24VDC

Full-load power consumption: 4.344W@24VDC

Support redundant protection

Support overcorrect protection

Support reverse connection protection

Environmental:

Working temperature: -40°C~85°C

Storage temperature: -40°C~85°C

Relative humidity: 5%~95% (no condensing)

Mechanical:

Shell: IP30, high strength iron shell.

Installation: DIN Rail

Weight: 690.8g

Dimension (W×H×D) :138mm×53mm×110mm

Standard:

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 4

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Warranty

Warranty time: 5 years

Certificate:

CE, FCC, RoHS, UL508(Pending)

Ordering information

Option model	Port		Power supply range
Wide temperature (-40°C~85°C)	Gigabit fiber port (SFP)	Gigabit Ethernet port	12~48VDC
IES206G-2GS-P	2	4	

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

