

IMC101GT

Features

- ◎ Support 1 10Base-T/100Base-TX/1000 Base-TX port and 1 1000Base-X SFP port
- ◎ Support IEEE802.3/802.3u/802.3x/802.3z store and forward
- ◎ Ethernet port support 10/100/1000M self-adaption
- ◎ Support LFP
- ◎ DC12~48V power input
- ◎ IP40 protect grade, high strength iron shell, DIN Rail installation




Introduction

IMC101GT is a kind of industrial gigabit media converter, it support 1 10Base-T/100Base-TX/1000 Base-TX port and 1 1000Base-X SFP port. It support LFP function, it is easy to check the network connection status,, it also support CE,FCC standard, IMC101 adopt industry standard design, IP30 protection, rugged high-strength metal case, power supply input(12V~48VDC), -40 to 85°C working temperature.

Dimension and appearance

Unit (mm)

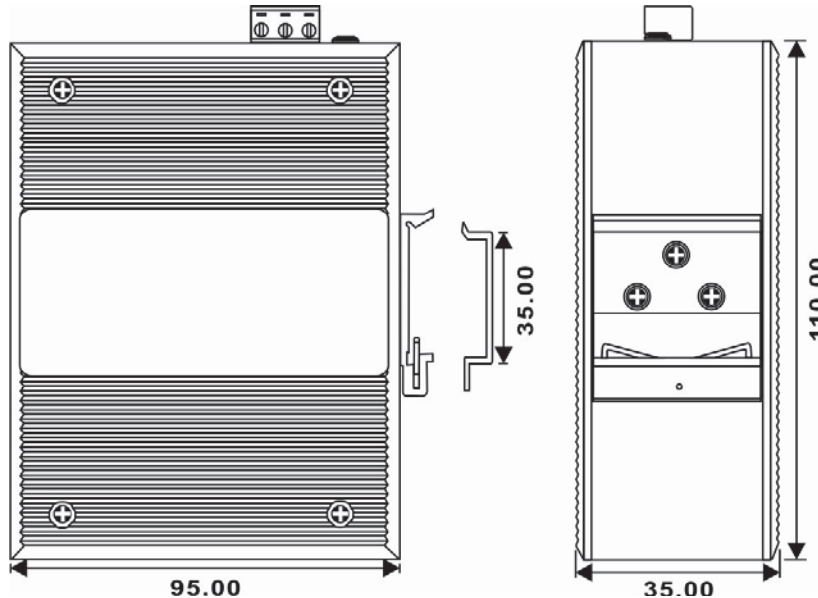

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C



Specs

Technology:

Standard: IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3z

Flow control: IEEE802.3x, back pressure control

Interface:

Gigabit Ethernet
port: 10Base-T/100Base-TX/1000Base-TX

Self-adaption

Gigabit fiber port: 1000Base-X SFP

Transmission:

Twisted pair: 100M (Standard CAT5/CAT5e cable)

Multi mode fiber: 1310nm, 2Km

Single mode fiber: 1310nm, 20/40/60Km

1550nm, 20/40/60/80/100/120Km

Exchange of attribute:

100M forward speed: 148810pps

1000M forward speed: 1488100pps

Transmission: Store and forward

Memory: 1Mbits

MAC address: 1K

Indicator:

System: RUN

Ethernet port: G1 LINK

Fiber port: G2 LINK

Remote Ethernet port alarm: G1 LFP

Remote Fiber port alarm: G2 LFP

Power supply:

Power input: 24VDC(12~48VDC)

Terminal block: 3 bits 7.62mm terminal block

No-load power consumption: 1.512W@24VDC

Full-load power consumption: 1.800W@24VDC

Support reverse connection protection

Mechanical:

Shell: IP40, high strength iron shell.

Installation: DIN Rail

Weight: 346.6g

Dimension (W×H×D): 110mm×35mm×95mm

Environmental:

Operating Temperature: -40 to 85°C

Storage Temperature: -45°C to 85°C

Ambient Relative Humidity:

10 to 95% (non-condensing)

Standard:

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 1

EN61000-4-4 (EFT), Level 4

EN61000-4-5 (Surge), Level 3

Shell: IEC 60068-2-27

Warranty:

Warranty time: 5 years

Certification:

CE, FCC, RoHS, PAL, UL508(pending)

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telkolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

