

**PMD Characterization System for High-Speed Optical Network Installation & Certification**

MTP-500 Polarization Mode Dispersion (PMD) Analyzer consisting of an independent optical source (the Source) and the analyzer module (the Receiver) tests single-mode fibers quickly and easily. It measures PMD using the ITU-T G.650 recommended method with high-speed scanning technique, which ensures the best immunity against fiber movement. Windows XP platform and easy to use analysis software shorten learning process and enhance productivity.

**Features**

- ◆ ITU-T G.650 recommended method for PMD characterization:
  - Accurate total PMD, PMD coefficient
  - Intelligent certification: Threshold setting enables auto Pass/Fail assessment
- ◆ Fully support 10G/40G/100G DWDM optical network upgrade test
- ◆ High-speed scanning technique enables the best immunity against fiber movement during test
- ◆ Compliant with G.650.2, EIA/TIA FOTP-124 & IEC-61941
- ◆ High dynamic range for long span measurement
  - 40dB or 200Km
  - 48dB high power light source available for 240Km
- ◆ Industry’s fastest measurement speed: 2s
- ◆ Test through optical amplifiers
- ◆ Suitable for aerial and buried fiber infrastructure
- ◆ Windows XP with PMD Analyser software for fast setup and easy handling
- ◆ Easy to use touch screen
- ◆ Professional and comprehensive test report
- ◆ Internal battery supports 5 hours continuous operation
- ◆ Rugged casing, field application ready
- ◆ External ports: RJ45x1, RS232x1, USBx2, VGAX1
- ◆ CE, FCC certificates



**MTP-500-A PMD Analyzer**



**MTP-500-L PMD Source**



Comprehensive and Professional Test Report

PMD Test System - Measurement Report

Measurement ID

Test set-up





Wavelength range	1525-1570nm
Step size	0.05nm

Measured data

PMD [ps/sqrt(km)]	PMD [ps]	FUT [pass/fail]	User limit [ps]	Fiber type	Date/Time
0.04	0.38	pass	3.00	Standard	04.08.2009/09:48

PMD statistics


Number of PMD measurements	10
Delay between measurements [HH:MM:SS]	00:00:00
Average PMD [ps]	0.41
Standard deviation [ps]	0.06
Max. PMD value [ps]	0.49
Min. PMD value [ps]	0.32
PMD [ps] #1	0.49
PMD [ps] #2	0.49
PMD [ps] #3	0.47
PMD [ps] #4	0.44
	0.32
	0.39
	0.32
	0.38
	0.39
	0.38

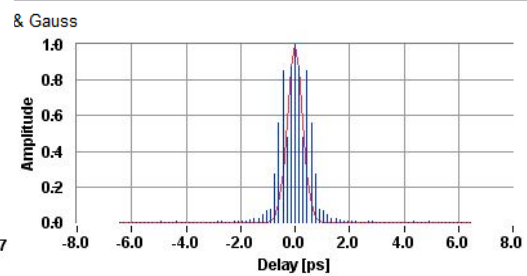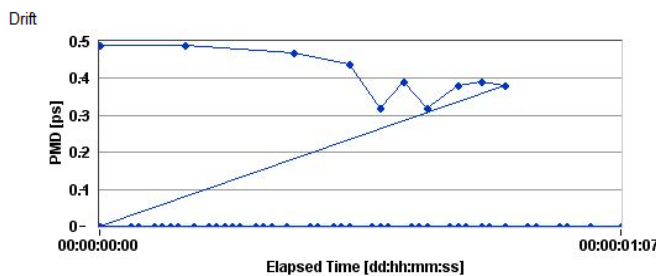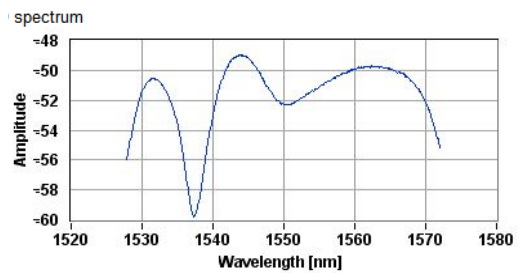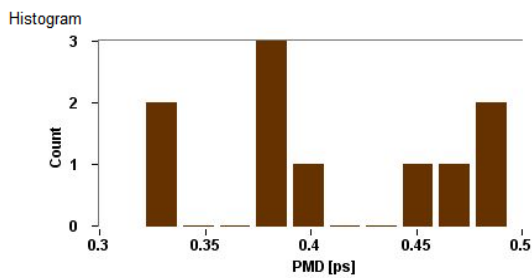

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

[www.telkolink.com](http://www.telkolink.com)

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C



## Specifications

Model	MTP-500
Operating System	Windows XP
Display	10.4" TFT Touch Screen (800×600)
Connectivity	USB×2; RJ-45 (10/100 Mbit/s)×1; RS232×1; VGA×1
Data Storage	4G CF Card
<b>MTP-500-L PMD Source</b>	
Wavelength (nm)	1525-1565
Output Power	< 20mW
<b>MTP-500-A PMD Analyser</b>	
Dynamic Range (dB)	>40 (Optional 48dB)
Measurement Method	ITU-T G650
PMD Range <sup>(1)</sup>	0.2 - 35ps
PMD Accuracy <sup>(2)</sup>	±(0.1ps+5% of PMD)
DGD Range <sup>(3)</sup>	0.5 - 90ps (for Polarization Maintaining Fiber)
DGD Accuracy <sup>(3)</sup>	± (0.1ps + 3% of DGD)
Wavelength Scanning Time	< 100 ms
Measurement Time	2-10s (depending on PMD value)
<b>General Specifications</b>	
Power Supply	Li-Ion Rechargeable Battery / AC Adaptor
Battery Life	(Continuous operation) PMD Analyser ≥5hrs; Source ≥7hrs
Operating Temperature	0°C - 40°C
Storage Temperature	-20°C - 60°C
Relative Humidity	0-90% (non-condensing)
Weight	PMD Analyser: 3.1kg; Source: 1kg
Dimensions (H×W×T)	PMD Analyser: 320×240×90mm; Source: 170×170×55mm

Notes:

(1) For standard SMF, with strong mode coupling, length≥100m;

(2) For standard SMF, with strong mode coupling, length≥100m, with single standard PMD emulator;

(3) For HiBi fiber, with weak mode coupling.

\* Specifications subject to change without notice

### Telkolink

**Add:** Perpa Ticaretr Merkezi A Blok No 516 Okmeydani / istanbul

**Tel:** 0212 320 4030

**Email:** bilgi@telkolink.com

**Fax:** 0212 320 0255

**Web:** www.telkolink.com

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

[www.telkolink.com](http://www.telkolink.com)

© 2009 telkolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

