

Model3011 Series

10/100/1000M Ethernet SFP Media Converter

Features

1. Accord to IEEE802.1 10Base-T, IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-TX, IEEE802.3z 1000Base-SX/LX
2. MDI/MDI-X auto negotiation, 10M/100M/1000M auto negotiation
3. Supports full /half duplex, Point-to-point transparent transfer
4. With one SFP slot
5. Plug-and-play, easy to installation
6. Can insert to 2U 19", 14 slots Rackmount(power external)



Introduction

Model3011, 10/100/1000Mbps adaptive Gigabit Ethernet fiber converter uses the switching technology to conduct media conversion, which meets the standards of IEEE802.3, IEEE802.3u, IEEE802.3z and IEEE802.3ab. This kind of media converter supports two types of media network connections: 10Base-T/100Base-TX/1000Base-T and 1000Base-SX/LX. Model3011 can conduct mutual conversion

between 10Base-T/100Base-TX/1000Base-T twisted pair electrical signals and 1000Base-SX/LX optical signals. This media converter extends the transmission distance of a network from 100m over copper wires to 120 Km. This media converter supports transmission in dual-fiber multi-mode, dual-fiber single-mode, SFP style fiber-optic connections.

Specification

Standards: comply with IEEE802.1 10Base-T, IEEE802.3u 100Base-TX, IEEE 802.3ab 1000Base-TX, IEEE802.3z 1000Base-SX/LX standards

RJ45 port rate: 10/100/1000Mbps auto negotiation

Optic port rate: 1000Mbps

Transfer distance: RJ45port: 100m

Fiber optic: 20,40,60,80,100,120km(SM),
550m(MM) optional

RJ45 port cable: UTP 5E

Fiber connector: LC

Fiber optic cables: Single Mode: 8.3/125, 8.7/125, 9/125 or 10/125 um
Multi-Mode: 62.5/125, 50/125 um

Wavelength: 850nm, 1310nm, 1550nm

Power

Power supply: External(5VDC), optional

Consumption: 4W

Environment

Operating temp: -10°C to 65°C

Storage temperature: -20 to 70°C

Operating humidity: 5% to 95%(no condensation)

Appearance

Dimensions: 94.0×71.0×26.0mm(Power External)

Shell: Iron

Color: White

Weight: 230g(power external)

Warranty: 5 years

Approvals: FCC, CE, RoHS approvals

Packing List

1. Model3011 series Ethernet Media Converter×1
2. 5VDC power adapter × 1(Media converter/5VDC, power external)
3. User manual ×1


Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C



Dimension

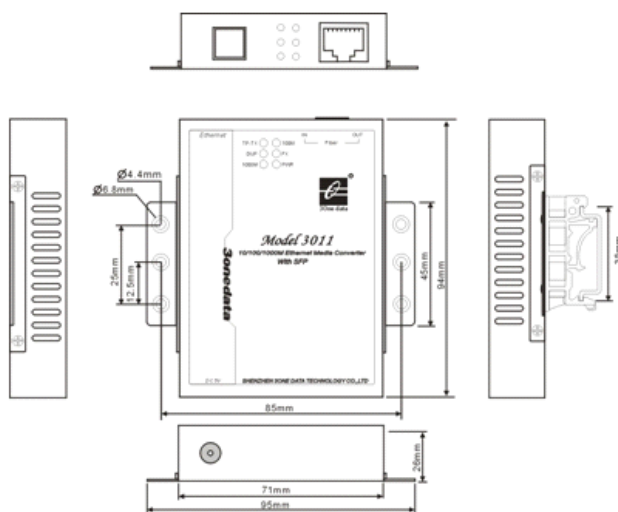

Ordering Information

Model3011 | Gigabit SFP Media Converter W/O SFP

1000Base-Base SX : LC Duplex GBIC Module - Multimode 850nm 550Mt

1000Base-Base LX : LC Duplex GBIC Module - Singlemode 1310nm 20km

1000Base-Base ZX : LC Duplex GBIC Module - Singlemode 1550nm 80km

1000Base-BIDI35 : LC Single Fiber SFP TX 1310nm RX 1550nm SMF

1000Base-BIDI53 : LC Single Fiber SFP TX 1550nm RX 1310nm SMF 20KM

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

