

OCC-50 CWDM Optical Channel Checker

Powerful Tool for CWDM Installation, Maintenance & Troubleshooting


- ◆ Clear TFT LCD display (320×240)
- ◆ 8-channel measurement (1471-1611 nm)
- ◆ Result display in histogram and list
- ◆ Applicable to normal optical power measurement
- ◆ Internal clock & fiber S/N editable
- ◆ User definable threshold setting
- ◆ Data Transfer to PC via USB
- ◆ No warm-up, quick start
- ◆ Backlight
- ◆ 10 hours continuous operation
- ◆ Pocketsize, lightweight and easy-to-use
- ◆ CE, FCC certificates



OCC-50 Handheld CWDM Optical Channel Checker is specially designed for CWDM installation, maintenance and troubleshooting, which is able to measure and monitor power values of 8 CWDM channels. OCC-50 can replace high-cost Spectrometers and conduct quick and reliable measurements in all environments. Thanks for its light, compact and sturdy design, OCC-50 is the ideal tool for CWDM installation and maintenance technicians.

Result display in histogram and list

Straightforward result display for easy understanding.

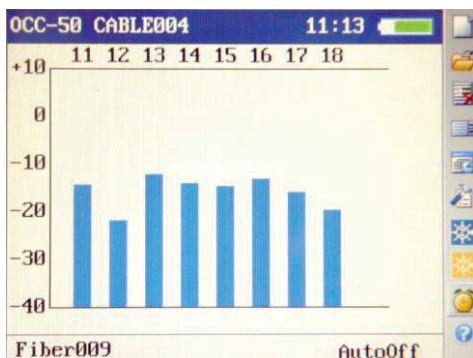

Channel	WaveLength	Power
11	1471 nm	-14.20 dBm
12	1491 nm	-21.69 dBm
13	1511 nm	-12.04 dBm
14	1531 nm	-13.75 dBm
15	1551 nm	-14.54 dBm
16	1571 nm	-13.00 dBm
17	1591 nm	-15.79 dBm
18	1611 nm	-19.39 dBm

Internal clock & fiber S/N editable

Internal clock enables OCC-50 to save test data with time and editable fiber SN information for convenient archiving and editing.



Specifications

Model	OCC-50A
CWDM Module	
Wavelength (nm)	1460~1620
Power Range (dBm)	-40 ~ +10
Channel Number	8
Channel Spacing	20nm
Central Wavelength	ITU
Channel Band-pass	ITU±6.5nm
Channel Power Resolution	±0.01 dB
Channel Power Accuracy	±0.5 dB
Channel Power Repeatability	±0.5 dB
Maximum Input Power	13 dBm
ORL	>45 dB
Measurement Unit	W/mW/μW/nW/pW/dBm/dB (REF)
Data Storage	1000 sets
Connectivity	USB
Detector Type	InGaAs
Application Range	Singlemode Fiber
Connector	FC/PC (Interchangeable SC/ST)
Power Saving	Auto-off after 5 minute idle
OPM Module	
Calibrated Wavelength (nm)	850,1300,1310,1490,1550,1625
Power Range (dBm) ⁽¹⁾	-70 ~ +10
Accuracy	±0.25 dB (5%) @25°C & -10dBm (±0.5 dB@850nm)
Resolution	0.01 dB
General Specifications	
Power Supply	NiMH Rechargeable Battery / AC Power Adaptor
Battery Life	Continuous operation ≥10 hours
Weight	1kg (2.2 lbs)
Dimensions (H × W × T)	220×110×70mm (8.7×4.3×2.7 inch)

Note: (1) At 850nm, the lower limit of measurement range is -60 dBm

* Specifications subject to change without notice

Ordering Information

Standard Package:

Instrument, NiMH battery, AC adaptor, USB data cable, OCC software CD, Soft carrying case, Warranty card, CE certificate, Certificate of calibration, User's guide.

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

Quality Link Connections

