


RG316/U

High Frequency FEP Coaxial Cable

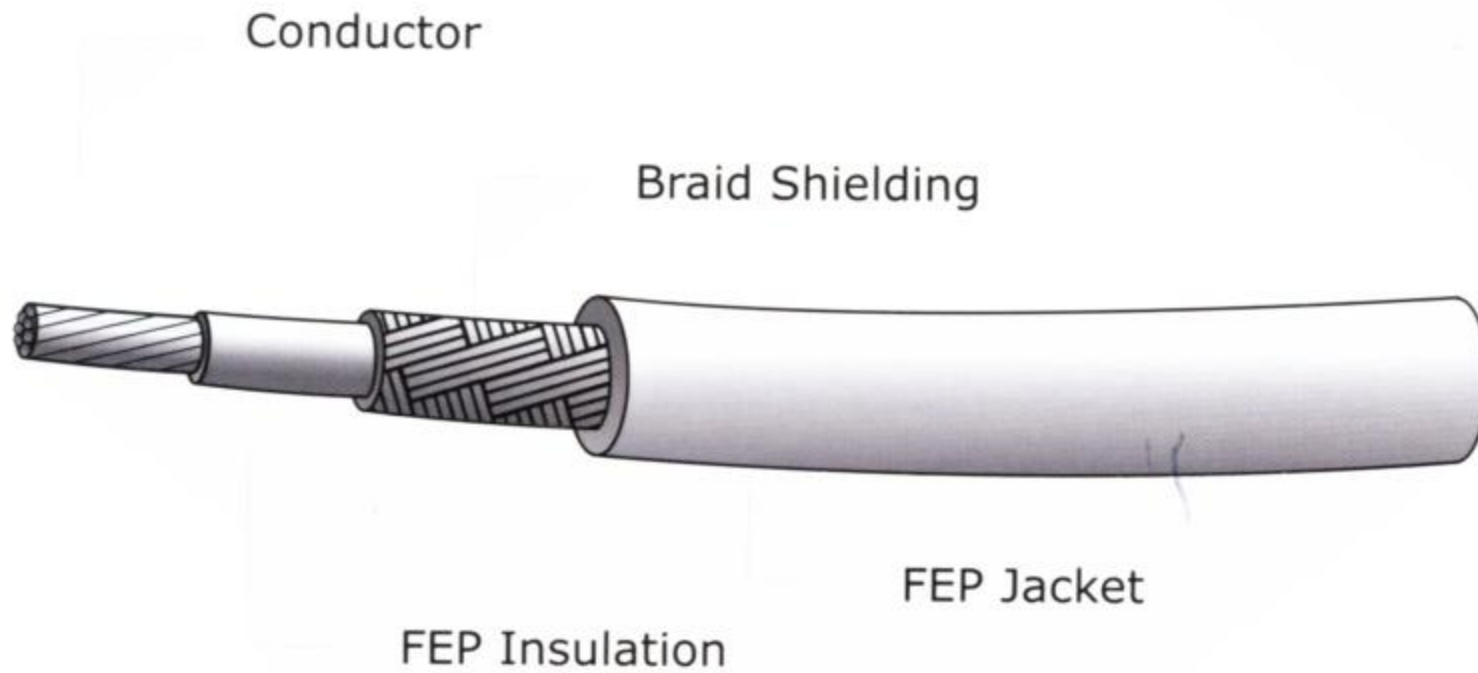

The coaxial cable conforms to MIL-C-17 specification

Cable Data:

Coaxial type	Conductor		Insulation	Braid	Jacket
	AWG	No./AWG	Diameter	Coverage	Diameter
			(mm)	(%)	(mm)
RG316/U	26	7/0.175 SCCS or SC	Solid FEP 1.53±0.03	Carrier: 16 Ends: 5 Wire: 0.10 SC Coverage: 95	FEP 2.53±0.10

Coaxial type	Impedance	Capacitance	VSWR(max.)		Vel. of Prop.	Insulation Resistance
	(ohms)	(pF/m)	Frequency(Hz)			MEGA OHM/KM min
			3G	6G		
RG316/U	50±3Ω	95.8	1.2	1.3	69.00%	3000

Remark:

SCCS: Silver-Coated Copper Steel

SC: Silver-Coated Copper