

RP-G3224DB

24-P Fast Ethernet + 2-P Gigabit (TP/SFP) combo Switch



RP-G3224DB is unmanaged gigabit uplink Ethernet switch, it supports 24 10/100M auto-negotiation Ethernet port and 2 gigabit RJ45/SFP (mini GBIC) multiplex ports, to increase bandwidth and reduce access latency for the client connection and meet the needed of high load. All ports support non-blocking full wire speed switching and Auto-MDI/MDIX, The switch is Plug-n-Play without any software to configure and also fully compliant with all kinds of network protocols.


Feature

- Comply with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z standards
- All ports support full duplex 802.3x flow control and half-duplex back pressure Flow Control
- 24 10/100M auto-negotiation RJ45 ports, 2 gigabit RJ45/SFP(mini GBIC) multiplex ports
- Using store and forward switch mode
- Support the MAC address self-learning
- LED indicators light dynamic display the status of equipment and provide a simple trouble shooting

Specification

Standards	<ul style="list-style-type: none"> • IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x
Interface	<ul style="list-style-type: none"> • 24* 10/100 RJ-45 ports • 2* 10/100/1000 RJ-45 / SFP combo ports • One Restore Default Button
NWay Protocol Support	<ul style="list-style-type: none"> • 10/100Mbps: Full-duplex, Half-duplex • 1000Mbps: Full-duplex
Background Bandwidth	<ul style="list-style-type: none"> • 8.8Gbps
MAC Address Table	<ul style="list-style-type: none"> • 8K
Forwarding Rate	<ul style="list-style-type: none"> • 10Mbps: 14880PPS • 100Mbps: 148800PPS • 1000Mbps: 1488000PPS
LED Indications	<ul style="list-style-type: none"> • Power, Link/Act 1~26, Speed 1~26
Power Consumption	<ul style="list-style-type: none"> • 15W
Power Supply	<ul style="list-style-type: none"> • Internal Power Supply 100~240VAC, 50~60Hz
Environment	<ul style="list-style-type: none"> • Operating temperature : 0°C to 40°C • Operating Humidity:10% to 90% (Non-Condensing)
Dimension	<ul style="list-style-type: none"> • 440 * 180 * 44mm
Certification	<ul style="list-style-type: none"> • FCC, CE

Application

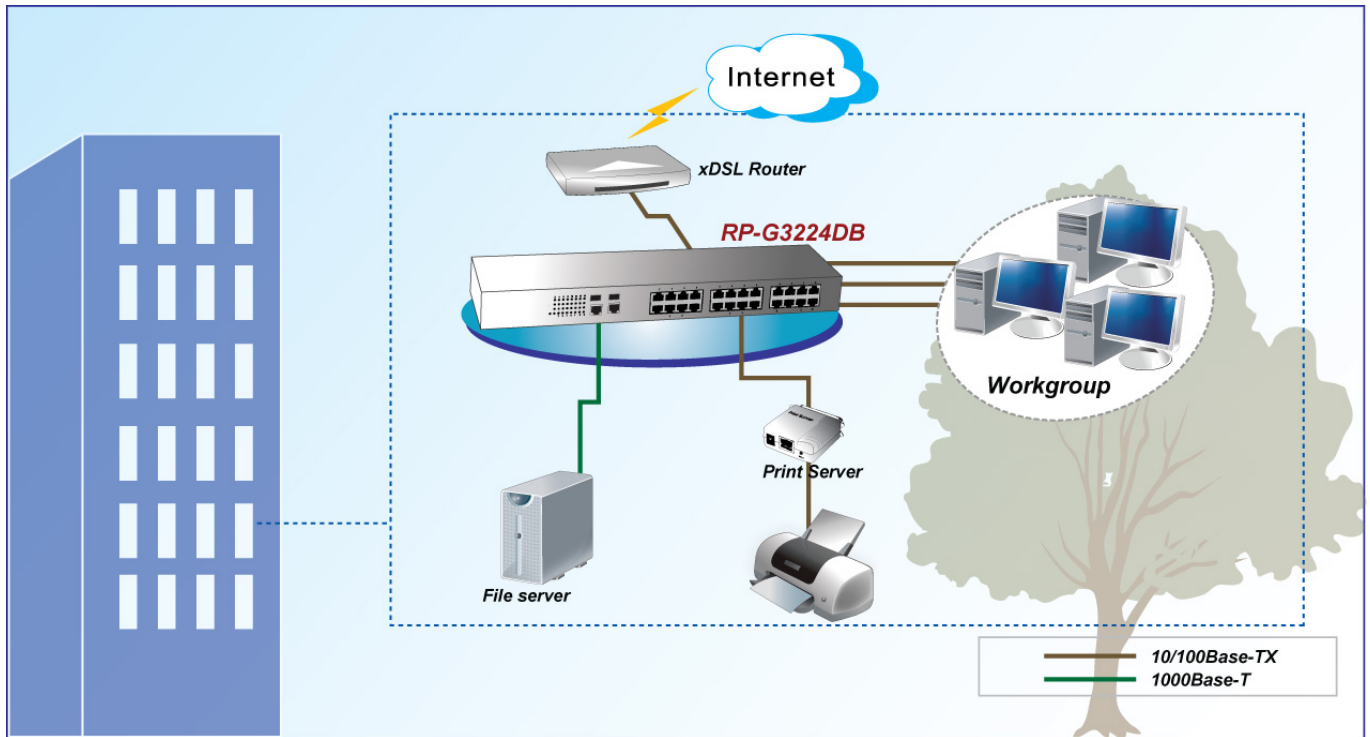

Ordering information

RP-G3224DB 24-P Fast Ethernet + 2-P Gigabit(TP/SFP) combo Switch

Address : Perpa Ticaret Merkezi, A Blok No.295 Sisli/Istanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

