

RP-IPG402-12V

4-P Gigabit + 2-SFP(100/1G) slot Industrial Switch W/ 4-Port PoE+



RP-IPG402-12V Industrial Ethernet switch with POE+ feature complies with IEEE802.3af and IEEE802.3at. it delivers 30watts power per POE port and generates total 120 watts power to PD devices and 2 SFP slots are supported.

RP-IPG402-12V provides wide power input voltage range +12 ~ + 55Vdc, it is not only boost up Input Voltage, also reduce the excessive heat problem to a minimum ,which secure equipment against unregulated voltage and make systems safer and more reliable.

With IP-30 standard industrial case protection allows either DIN rail or wall mounting for efficient use of cabinet space. Wide operating temperature range -40°C to 75°C for harsh environment


Feature

- Supports P.S.E. based on IEEE 802.3at up to 30 Watts per port
- SFP port supports 100Base-FX and 1000Base-X speed
- Support dual wide range12~55VDC power inputs for power redundancy
- Support overload current protection
- Support reserve polarity protection
- Supports auto-negotiation and auto-MDI/MDI-X
- Supports store and forward transmission
- Supports flow control
- Rigid IP-30 housing design
- DIN-Rail and wall mounting enabled

Specification

Standards	<ul style="list-style-type: none"> • IEEE 802.3 10Base-T Ethernet • IEEE 802.3u 100Base-TX Fast Ethernet • IEEE 802.3ab 1000Base-T Gigabit Ethernet • IEEE 802.3z 1000Base-X Gigabit Ethernet • IEEE802.3x Flow Control and Back Pressure, • IEEE802.3af for POE • IEEE802.3at for POE+
Switch Architecture	<ul style="list-style-type: none"> • Back-plane (Switching Fabric): 12Gbps
Data Processing	<ul style="list-style-type: none"> • Store and Forward
Flow Control	<ul style="list-style-type: none"> • IEEE 802.3x Flow Control and Back Pressure
Jumbo Frame	<ul style="list-style-type: none"> • 10KB
MAC Table Size	<ul style="list-style-type: none"> • 1K
Packet Buffer Size	<ul style="list-style-type: none"> • 1Mbits
Network Connector	<ul style="list-style-type: none"> • 4 RJ-45 Port: 10/100/1000BaseT(X) auto negotiation, 4 Giga POE+ 802.3at/af PSE port, Auto MDI/MDI-X function, Full/Half duplex • 2 SFP slots: 100/1000M Base-X
Network Cable	<ul style="list-style-type: none"> • UTP/STP above Cat.5e Cable, EIA/TIA-568 100-ohm (100m) • Fiber Cable (Multi-mode):50/125um,62.5/125um • Fiber Cable (Single-mode): 9/125um
Protocol	<ul style="list-style-type: none"> • CSMA/CD
LED	<ul style="list-style-type: none"> • PW1(Power 1) Green, PW2(Power 2) Green, ERR(Fault) Amber • TX/RJ-45 port: LNK (Link/Active) Green, SPD(Speed) 10/100(OFF) ,1000 (Green) • SFP Fiber Per port: Link (Green) , Active Flash
DIP Switch	<ul style="list-style-type: none"> • DIP 1: OFF: Port 5 SFP (DEFAULT) ; ON: Port 5 TX • DIP 2: OFF: SFP 1000M ; ON: SFP 100M
Power Supply	<ul style="list-style-type: none"> • Redundant Dual DC 12V-57V Power Input
Power Consumption	<ul style="list-style-type: none"> • 5.76W@12/24/48 VDC, Non POE
Alarm Relay Contact	<ul style="list-style-type: none"> • Relay outputs with current carrying capacity of 1A @24VDC • Relay in short circuit mode when 2 powers are connected. in open circuit mode when only one power supply is connected
PoE power budget	<ul style="list-style-type: none"> • Per port 30W, Max.36W per port at 12/24/48VDC input • Max. 126W @24VDC and 48VDC power input • Max. 85W @12VDC power input (at 75°C) • Max. 95W @12VDC power input (at 70°C)
Removable Terminal Block	<ul style="list-style-type: none"> • Provide 2 Redundant power ,Alarm relay contact ,6 Pin
POE efficiency	<ul style="list-style-type: none"> • Voltage boost efficiency up to 97% from 12VDC to 55VDC
Surface temperature	<ul style="list-style-type: none"> • Surface temperature rises 6°C full load in a 75°C chamber
Operating Temperature	<ul style="list-style-type: none"> • -40°C ~75°C
Storage Temperature	<ul style="list-style-type: none"> • -40°C~85°C
Operating Humidity	<ul style="list-style-type: none"> • 5% to 95% (Non-condensing)
Housing	<ul style="list-style-type: none"> • Rugged Metal ,IP30 Protection
Dimension	<ul style="list-style-type: none"> • 142 x 43 x 105mm (LxWxD)
Installation mounting	<ul style="list-style-type: none"> • DIN Rail mounting and Wall Mounting
EMC/EMS	<ul style="list-style-type: none"> • CE, FCC
EMI	<ul style="list-style-type: none"> • FCC Part 15 Subpart B Class A • CE EN 55022 Class A

Diagram

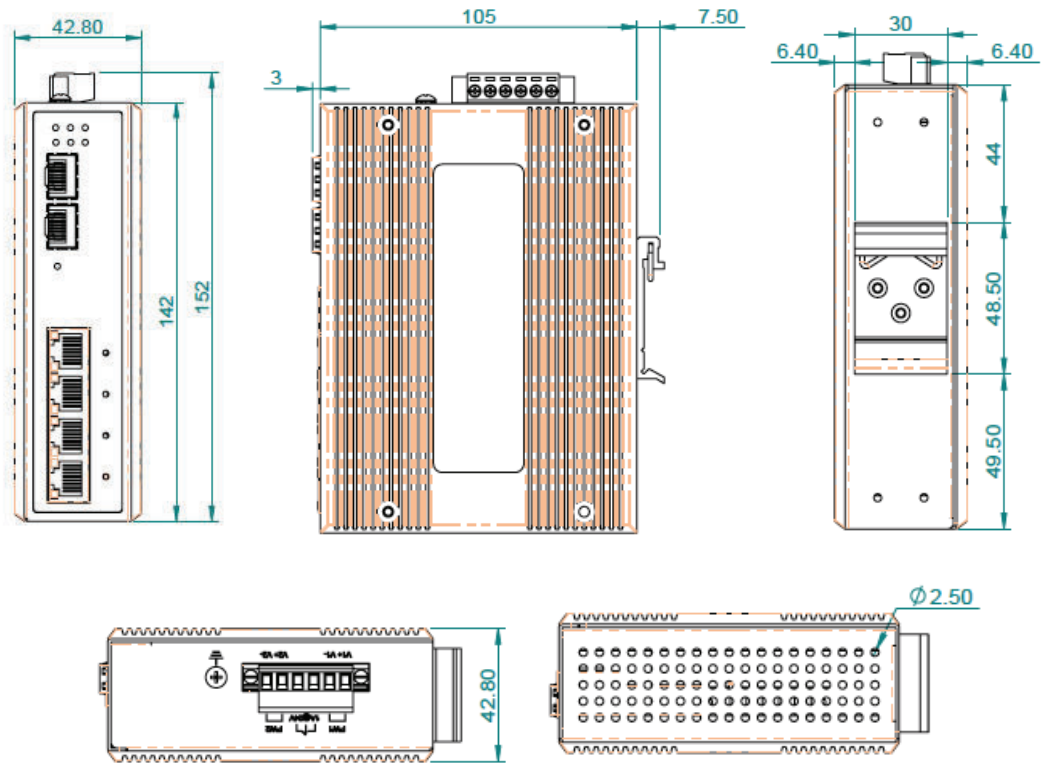

Ordering information

RP-IPG402-12V 4-P Gigabit + 2-SFP(100/1G) slot Industrial Switch, W/ 4-Port PoE+

Address : Perpa Ticaret Merkezi, A Blok No.295 Sisli/Istanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telkolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

Quality Link Connections

