

## RP-ISF080

### 8-P 10/100TX Industrial Ethernet Switch

The RP-ISF080 is a 8-port 10/100TX Industrial Switch, it is a cost-effective solution and meets the high reliability requirements demanded by industrial applications, such as factory assembly line, automation, transportation and heavy Industrial factory.

The switch comes with wide range of voltages power supply source, which secure equipment against unregulated voltage(12 to 48VDC) and make systems safer and more reliable.

The switch with IP-30 standard compact metal case allows either DIN rail or wall mounting for efficient use of cabinet space.




## Feature

- RJ-45 port support Auto MDI/MDI-X Function
- Store-and-Forward Switching Architecture
- Back-plane (Switching Fabric): 1Gbps
- 448Kbits Memory Buffer
- 2K MAC Address Table
- Support Wide Operating Temperature
- Power Polarity Reverse Protect
- Overload Current Re-settable Fuse Present
- Provides broadcast storm protection
- IP-30 Protection
- DIN Rail and Wall Mount Design
- Provides EFT protection 3000 VDC for power line
- Supports 4000 VDC Ethernet ESD protection

## Specification

<b>Standards</b>	<ul style="list-style-type: none"> <li>• IEEE 802.3 10Base-T Ethernet</li> <li>• IEEE 802.3u 100Base-TX Fast Ethernet</li> <li>• IEEE 802.3x Flow Control and Back Pressure</li> </ul>
<b>Switch Architecture</b>	<ul style="list-style-type: none"> <li>• Back-plane (Switching Fabric): 1Gbps</li> <li>• Packet throughput ability (Full-Duplex): 1.49pps @64bytes</li> </ul>
<b>Transfer Rate</b>	<ul style="list-style-type: none"> <li>• 14,880pps for Ethernet port</li> <li>• 148,800pps for Fast Ethernet port</li> </ul>
<b>Memory Buffer</b>	<ul style="list-style-type: none"> <li>• 448Kbits</li> </ul>
<b>Mac Address</b>	<ul style="list-style-type: none"> <li>• 2K MAC</li> </ul>
<b>Interface</b>	<ul style="list-style-type: none"> <li>• 10/100TX: 8 *RJ-45 with auto MDI/MDI-X function</li> </ul>
<b>Network Cable</b>	<ul style="list-style-type: none"> <li>• 10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m)</li> <li>• 100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)</li> </ul>
<b>Protocol</b>	<ul style="list-style-type: none"> <li>• CSMA/CD</li> </ul>
<b>LED Indicators</b>	<ul style="list-style-type: none"> <li>• Per unit: Power 1 (Green), Power 2 (Green), Fault (Red)</li> <li>• Per port: Link/Active (Green), Full duplex/Collision (Yellow)</li> </ul>
<b>Reserve polarity protection</b>	<ul style="list-style-type: none"> <li>• Present</li> </ul>
<b>Overload current protection</b>	<ul style="list-style-type: none"> <li>• Present</li> </ul>
<b>Case</b>	<ul style="list-style-type: none"> <li>• Metal case. IP-30</li> </ul>
<b>Installation</b>	<ul style="list-style-type: none"> <li>• DIN Rail and Wall Mount Design</li> </ul>
<b>Power Consumption</b>	<ul style="list-style-type: none"> <li>• 3.84W</li> </ul>
<b>Power Supply</b>	<ul style="list-style-type: none"> <li>• DC 12~48V, Redundant power with polarity reverse protect function and removable terminal</li> </ul>
<b>Environment</b>	<ul style="list-style-type: none"> <li>• Operating temperature : Standard: -10°C~60°C;</li> <li>• Operating Humidity: 5% to 95% (Non-Condensing)</li> </ul>
<b>Dimension</b>	<ul style="list-style-type: none"> <li>• 30 * 95 * 140mm</li> </ul>
<b>EMI</b>	<ul style="list-style-type: none"> <li>• FCC Class A, CE EN61000-4-2 (ESD), CE EN61000-4-3 (RS), CE EN-61000-4-4 (EFT),</li> <li>• CE EN61000-4-5 (Surge), CE EN61000-4-6 (CS), CE EN61000-4-8, CE EN61000-6-2, CE EN61000-6-4</li> </ul>
<b>Safety</b>	<ul style="list-style-type: none"> <li>• UL, cUL, CE/EN60950-1, Class I, Division 2, Groups A, B, C, Hazardous Locations</li> </ul>
<b>Stability Testing</b>	<ul style="list-style-type: none"> <li>• IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)</li> </ul>
<b>Environmental Testing</b>	<ul style="list-style-type: none"> <li>• IEC60068-2-3, IEC60068-2-30, IEC60068-2-31</li> </ul>

## Application

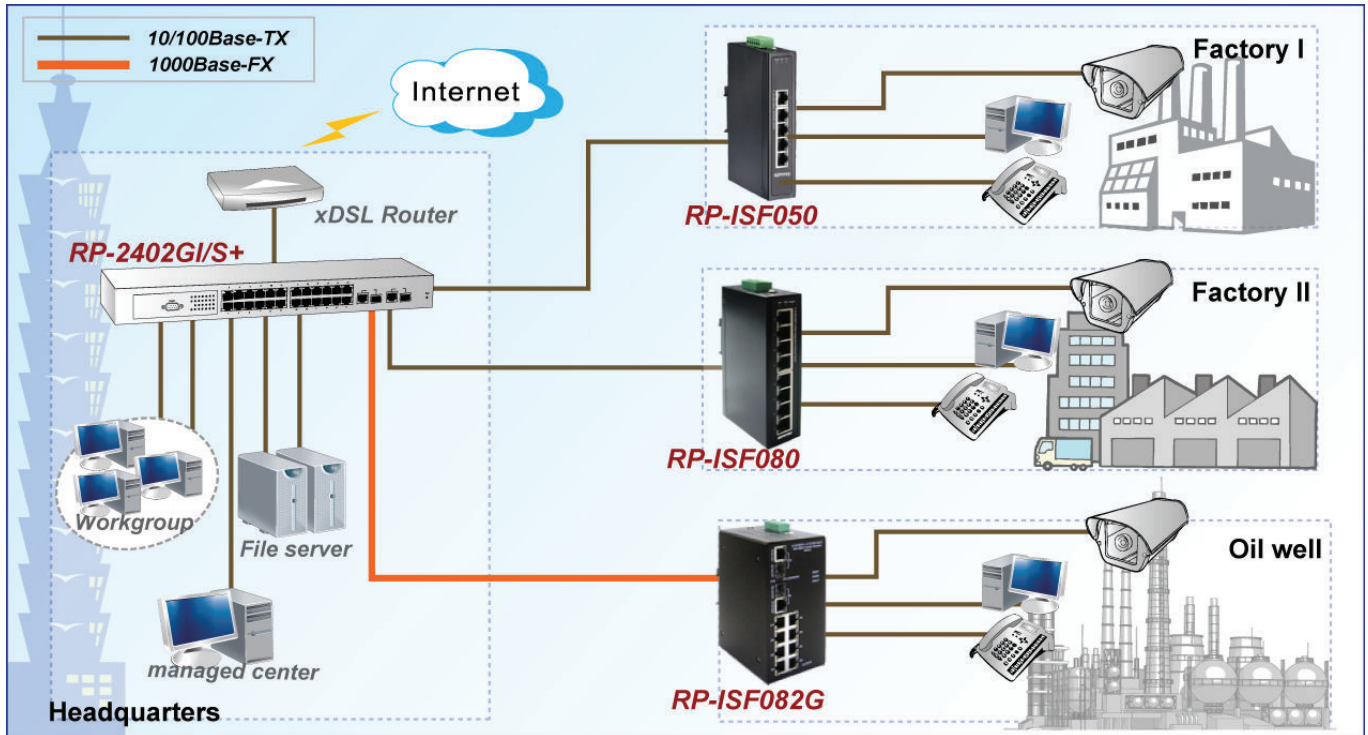

## Ordering information

**RP-ISF080** 8 10/100TX Industrial Ethernet Switch

Address : Perpa Ticaret Merkezi, A Blok No.295 Sisli/Istanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telcolink.com

[www.telcolink.com](http://www.telcolink.com)

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

**Quality Link Connections**

