

RP-ISG500

5-P Gigabit Industrial Switch

The RP-ISG500 is a 5-P Gigabit Industrial Switch, it is a cost-effective solution and meets the high reliability requirements demanded by industrial applications, such as factory assembly line, automation, transportation and heavy Industrial factory. It can be used as a stand-alone device to connect to end device, and it also can be used to cascaded/daisy-chain to other devices to cover wider area.



The switch comes with wide range of voltages (9 to 55V DC) power supply source, which secure equipment against unregulated voltage and make systems safer and more reliable. The switch with IP-30 standard compact metal case allows either DIN rail or wall mounting for efficient use of cabinet space.


Feature

- RJ-45 port support Auto MDI/MDI-X Function
- Store-and-Forward Switching Architecture
- Back-plane (Switching Fabric): 12Gbps
- 1Mbits Memory Buffer
- 1K MAC Address Table
- Power Polarity Reverse Protect
- With Overload Current Re-settable Fuse
- Provides broadcast storm protection
- IP-30 Protection
- DIN Rail and Wall Mount Design

Specification

Standards	<ul style="list-style-type: none"> • IEEE 802.3 10Base-T Ethernet • IEEE 802.3u 100Base-TX Fast Ethernet • IEEE 802.3ab 1000Base-T Gigabit Ethernet • IEEE 802.3z 1000Base-X Gigabit Ethernet • IEEE802.3x Flow Control and Back Pressure
Switch Architecture	<ul style="list-style-type: none"> • Back-plane (Switching Fabric): 12Gbps
Data Processing	<ul style="list-style-type: none"> • Store and Forward
Flow Control	<ul style="list-style-type: none"> • IEEE 802.3x Flow Control and Back Pressure
Jumbo Frame	<ul style="list-style-type: none"> • 10KB
MAC Table Size	<ul style="list-style-type: none"> • 1K
Packet Buffer Size	<ul style="list-style-type: none"> • 1Mbits
Network Connector	<ul style="list-style-type: none"> • 5 RJ-45 Port: 10/100/1000BaseT(X) auto negotiation, Auto MDI/MDI-X function, Full/Half duplex
Network Cable	<ul style="list-style-type: none"> • UTP/STP above Cat.5e Cable, EIA/TIA-568 100-ohm (100m)
Protocol	<ul style="list-style-type: none"> • CSMA/CD
LED	<ul style="list-style-type: none"> • PW1(Power 1) Green, PW2(Power 2) Green, ERR(Fault) Amber • TX/RJ-45 port: LNK (Link/Active) Green, SPD(Speed) 10/100(OFF) , 1000 (Green)
Power Supply	<ul style="list-style-type: none"> • Redundant Dual DC 9V-55V Power Input
Power Consumption	<ul style="list-style-type: none"> • 4W@48 VDC full load
Alarm Relay Contact	<ul style="list-style-type: none"> • Relay outputs with current carrying capacity of 1A @24VDC • Relay in short circuit mode when 2 powers are connected. in open circuit mode when only one power supply is connected
Removable Terminal Block	<ul style="list-style-type: none"> • Provide 2 Redundant power, alarm relay contact ,6 Pin
Surface temperature	<ul style="list-style-type: none"> • Aluminum housing Surface temperature stays the same as ambient temperature with a full load in a 75°C chamber
Operating Temperature	<ul style="list-style-type: none"> • -40°C ~75°C fully tested with full load 100M cable length
Storage Temperature	<ul style="list-style-type: none"> • -40°C~85°C
Operating Humidity	<ul style="list-style-type: none"> • 5% to 95% (Non-condensing)
Housing	<ul style="list-style-type: none"> • Rugged Metal, IP30 Protection
Dimension	<ul style="list-style-type: none"> • 142 x 43 x 105mm (LxWxD)
Installation mounting	<ul style="list-style-type: none"> • DIN Rail mounting and Wall Mounting
EMC/EMS	<ul style="list-style-type: none"> • CE, FCC
EMI	<ul style="list-style-type: none"> • FCC Part 15 Subpart B Class A • CE EN 55022 Class A

Diagram

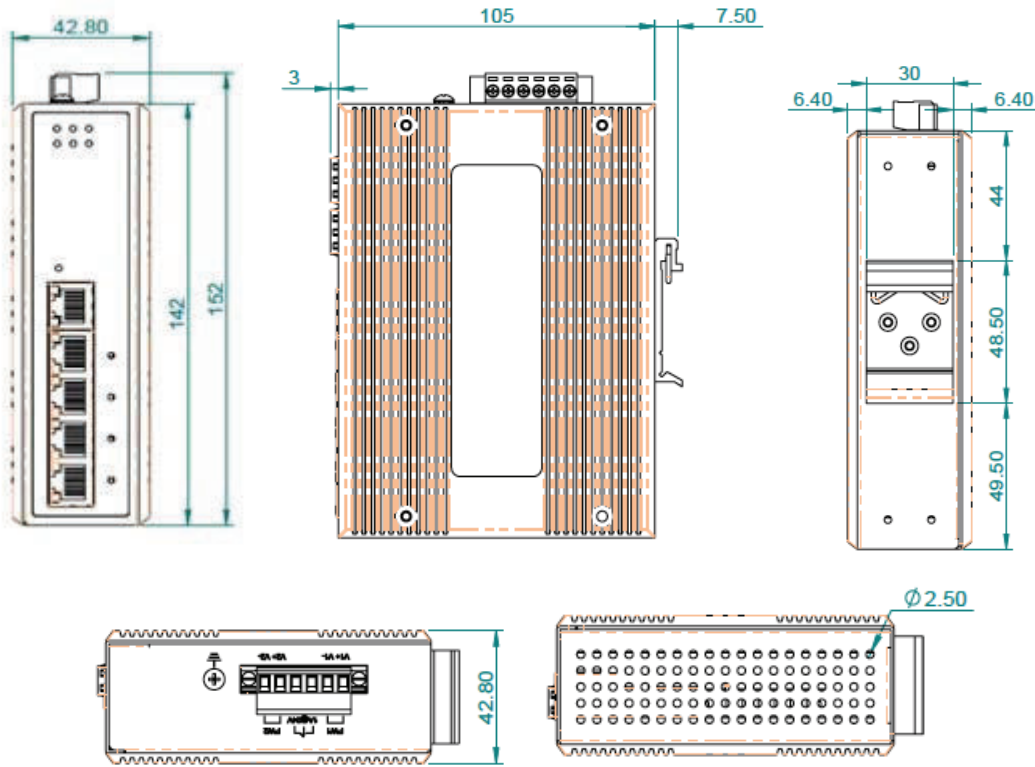

Ordering information

RP-ISG500 5-P Gigabit Industrial Switch

Address : Perpa Ticaret Merkezi, A Blok No.295 Sisli/Istanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telcolink.com

www.telcolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

