

RP- PE48004 10/100M PoE Injector

RP-PE48004, Single-port PoE Injector, takes 90~264Vac and delivers 48Vdc 400mA with base Unit for POE. It powers 48Vdc via pairs 4,5& 7,8 of the UTP cable and for power supply safety, it also supports over power protection maximum 96V for 48V output.




Feature

- Complies with IEEE 802.3/802.3u 10/100Base-T
- Provides 48Vdc via pairs 4,5(+)& 7,8(-) of RJ-45 cable and for power supply safety
- Distance up to 100 meters
- Provides up to 15.4W of Power over Ethernet

Specification

Input Requirements	<ul style="list-style-type: none"> • AC VOLTAGE: 90Vac TO 264Vac INPUT • FREQUENCY: 47Hz TO 63Hz • AC CURRENT: 0.6A MAX. • INRUSH CURRENT: 40A MAX. AT 115Vac AND FULL LOAD, COLD START, 25°C. 				
Output Requirements	• DC OUT REQUIREMENTS:				
	OUTPUT VOLTAGE	OUTPUT TOLERANCE	RIPPLE & NOISE	LOAD	
	+48Vdc	45.6V~50.4V	480mVp-p	MIN 0.0A	MAX 0.4A
Efficiency	<ul style="list-style-type: none"> • OVERSHOOT: OVERSHOOT SHOULD NOT EXCEED 10% OVER NOMINAL VOLTAGE • RISE TIME: 50mS MAX. • HOLD-UP TIME: MINIMUM 10mS AT 80% MAX LOAD, 115Vac INPUT 				
Protection Requirements	<ul style="list-style-type: none"> • THE SWITCHER SHOULD PROVIDE DC CONVERSION EFFICIENCY MINIMUM 80% AT FULL LOAD, 115Vac INPUT. 				
Environment	<ul style="list-style-type: none"> • OVER VOLTAGE PROTECTION: 96V MAX. FOR 48V OUTPUT • Operating temperature : 0°C to 40°C • Operating Humidity:20% to 90% (Non-Condensing) 				

Application

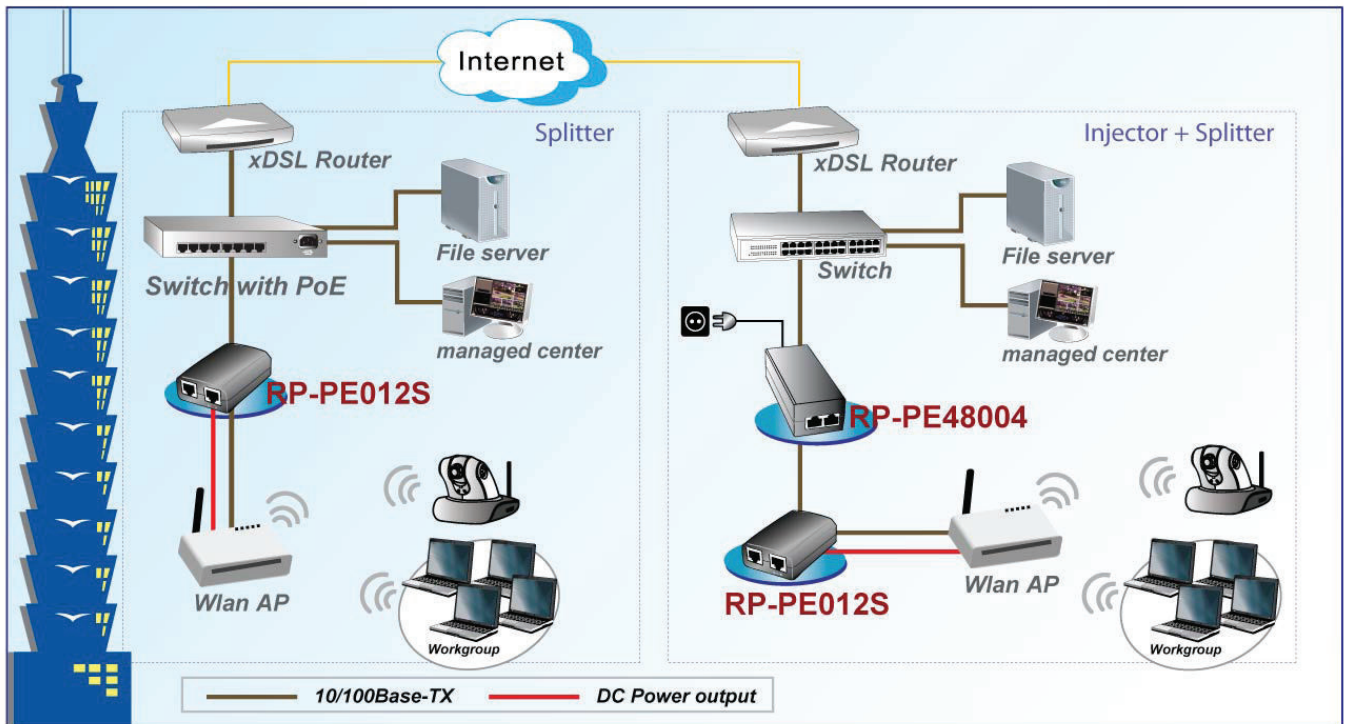

Ordering information

RP-PE48004 10/100M PoE Injector

Address : Perpa Ticaret Merkezi, A Blok No.295 Sisli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telkolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

Quality Link Connections

