

RP-PG1812I

16-P Gigabit + 2-SFP slot L2 Managed PoE+ Switch, w/ 12-port PoE



RP-PG1812I is a cost-effect high performance 18G L2 PoE switch - 16* 10/100/1000Mbps TX ports and 2* SFP ports are supported. This switch supports remote management by SNMP, Http and Telnet interfaces, and local management by console interface. Console interface is supported for some basic settings. RP-PG1812I supports lots of L2 switch functions, e.g. 802.1Q VLAN, 802.1x Port Security, Rate Control, Port Configuration, Port Mirroring, Port Statistics, QoS functions, ... etc. Auto-MDIX function is supported for every TX port of the switch for easy cable connection. RP-PG1812I is compliant with IEEE802.3af and the pre-standard of 802.3at. The 12* 10/100/1000Mbps TX ports (Port5 ~ Port16) are selectable to provide up to 15.4 or 30 watts power to connector PoE supported devices.

Feature

- Port 5 ~ Port 16 support PoE function (IEEE802.3af and IEEE802.3at are supported)
- Time Based PoE function
- Out-band console and in-band SNMP/Http/Https/Telnet management interface
- CISCO-like Command Line Interface
- IEEE802.1Q VLAN, 1024 active VLAN maximum with VID 1~4094
- Port-based VLAN & Private VLAN & VLAN Stacking(Q in Q)
- DHCP Relay Option 82
- IP-Port Binding
- IEEE802.3ad LACP for link aggregation
- IEEE802.1x for user authentication, Dynamic VLAN and Guest VLAN are supported
- IGMP snooping and query and MVR(Multicast VLAN Registration)
- 4 priority queues for Port-based, 802.1P QoS operation, with Strict Priority/WRR scheduling
- IEEE802.1d Spanning Tree Compatible & IEEE802.1w Rapid Spanning Tree
- Port rate limit for ingress/egress traffic & Storm Control
- Static MAC address binding / Dynamic Mac address number limit
- Event log and Syslog are supported
- Administrator IP/Subnet limit for security
- Radius Authentication for Management Access

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C




Specification

Standards	<ul style="list-style-type: none"> • IEEE802.3(10BaseT Ethernet), IEEE802.3u(100Base Fast Ethernet), • IEEE802.3ab(1000BaseT), IEEE802.3z(1000Base),IEEE802.3x • IEEE802.1D, IEEE802.1w, IEEE802.1P, IEEE802.1Q, IEEE802.1x • IEEE802.3ad, IEEE802.1ad • IEEE802.3af & IEEE802.3at
Interface	<ul style="list-style-type: none"> • 16* RJ45 ports, with 10/100/1000Mbps, Full/Half duplex auto-negotiation and Auto-MDIX and Fource MDI/MDIX function • 2* SFP 1000Base-x ports, Port 17 and Port 18
Console Port	<ul style="list-style-type: none"> • DB9 console port
Filter & Forwarding Rate	<ul style="list-style-type: none"> • Full line speed
Transmission method	<ul style="list-style-type: none"> • Store-and-forward
Packet Buffer	<ul style="list-style-type: none"> • 500K Bytes
Mac Table Size	<ul style="list-style-type: none"> • 8K
Max Packet Size	<ul style="list-style-type: none"> • 1518 bytes (without tag), 9600 bytes for Jumbo Frame
Flow Control	<ul style="list-style-type: none"> • Back pressure for half duplex, IEEE802.3x for full duplex
PoE Specification	<ul style="list-style-type: none"> • PoE Ports: 12 Ports(Port 5 ~ Port 16) • Per Port 56V DC, 350mA . Max. 15.4Watts ; Per Port 56V DC, 600mA . Max. 30Watts • 150Watts / 250Watts PoE Power Budget • Power PIN Assignment 1/2(-), 3/6(+) • PoE Time Based: PoE ON-OFF Control
Management	<ul style="list-style-type: none"> • Out-band : Console (CISCO-like Command Line Interface) • In-band : SNMP/Telnet/Http/Https • Administrator IP/Subnet limit is supported. • Radius Authentication for Management Access(Telnet/Http)
DHCP	<ul style="list-style-type: none"> • DHCP Client / Relay / Option 82 functions
SNMP agent	<ul style="list-style-type: none"> • Version. 1, 2c • Support MIB II(RFC1213), Bridge MIB (RFC 1493), • VLAN MIB (802.1Q, RFC2674), Private MIB
VLAN	<ul style="list-style-type: none"> • IEEE802.1Q VLAN with 1024 co-current groups maximum from 4094 VLANs • Port-based VLAN & Private VLAN & Q in Q
Trunking	<ul style="list-style-type: none"> • Support up to 8 trunks using either static or dynamic trunking (LACP)
QoS	<ul style="list-style-type: none"> • Four priority queues per port for Port-based & 802.1p tagged-based QoS • Strict Priority/WRR scheduling
Spanning Tree	<ul style="list-style-type: none"> • IEEE802.1d STP & IEEE802.1w RSTP
Port Mirror	<ul style="list-style-type: none"> • Support Port Mirror
Network Security	<ul style="list-style-type: none"> • IP-MAC-Port Binding • Static MAC Address Binding • Dynamic MAC Address Number Limit • DHCP Option 82 Functions, DHCP Snooping • Access Control List (ACL) • Administrator IP/Subnet Limit
IEEE 802.1x	<ul style="list-style-type: none"> • Transparent and Authentication modes • Dynamic VLAN & Guest VLAN are supported
Rate Control	<ul style="list-style-type: none"> • 1~31 levels, with level is configured between 128Kbps ~ 30Mbps
Storm Control	<ul style="list-style-type: none"> • for broadcast/flooding/multicast traffic control
IP Multicast	<ul style="list-style-type: none"> • IGMP Snooping(256 Groups Max.) / query and MVR function
Software Upgrade	<ul style="list-style-type: none"> • Out-band: Xmodem, In-band: TFTP/Http/Https

LED Indicators	<ul style="list-style-type: none"> ● Per Port: Link/Act , PoE Act ● Per Device: Power, System
Power Consumption	<ul style="list-style-type: none"> ● Max. 16W (no PD device connected)
Power Supply	<ul style="list-style-type: none"> ● Internal Power supply 100~240VAC, 50/60 Hz
Environment	<ul style="list-style-type: none"> ● Operating temperature : 0°C to 50°C ● Operating Humidity: 10% to 90% (Non-Condensing)
Dimension	<ul style="list-style-type: none"> ● 330 * 204 * 43mm
Certification	<ul style="list-style-type: none"> ● FCC, CE

Application

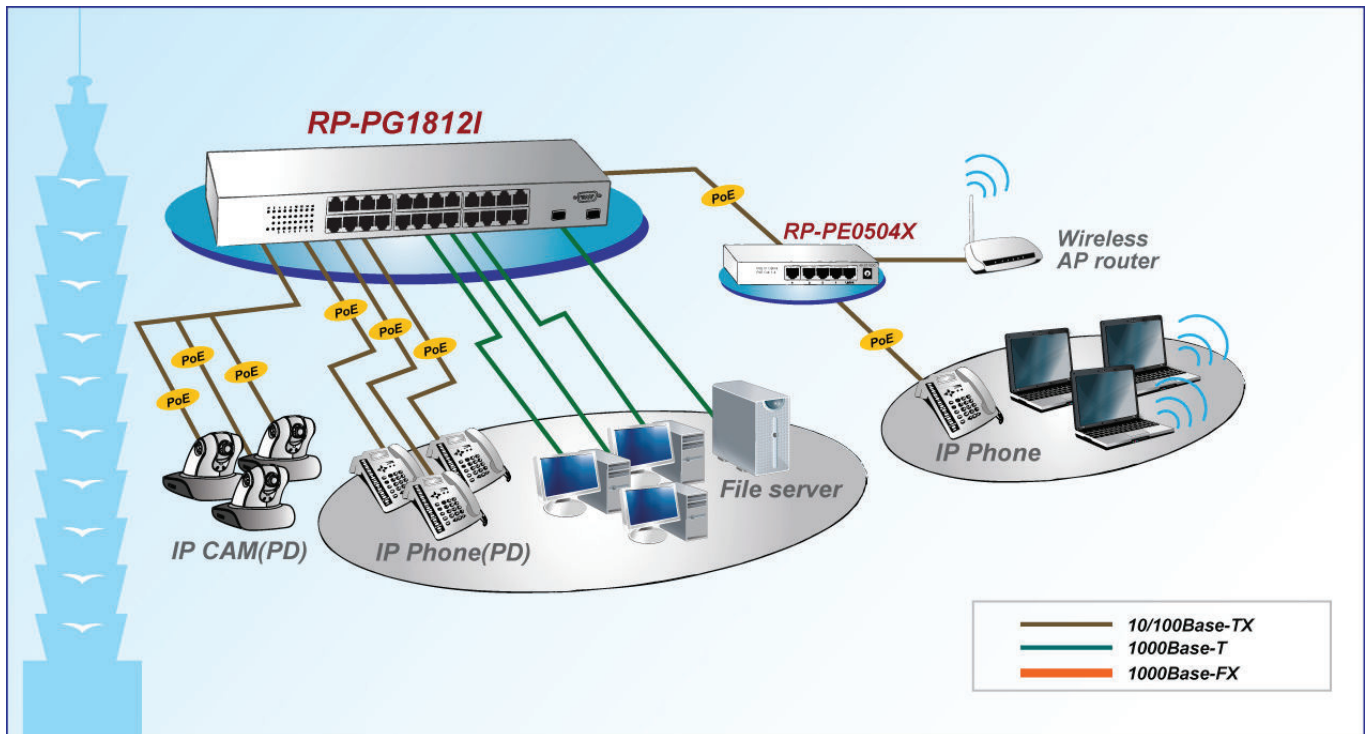

Ordering information

RP-PG1812I 16-P Gigabit + 2-SFP slot L2 Managed PoE+ Switch,
w/ 12-port PoE (150W)

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

Quality Link Connections

