

## RP-WAC5330

### Wireless-A Outdoor AP/ CPE, Integrated 14dBi dual-polarity antenna

RP-WAC5330 is the outdoor High-Power WISP AP/CPE which designed for connecting wireless communication devices together from the wireless ISP network. Wireless ISP network with integrated 14dBi dual-polarity antenna, which operates in the 5GHz band IEEE 802.11a mode. RP-WAC5330 supports data transmission rate is up to 300Mbps in 40MHz 802.11n mode. It is the best suited for Enterprises, or off-site locations in request of LAN or Internet access without cabling issues for wired cabling. RP-WAC5330 also support passive PoE allowing easy installation without any environment limitation. It's easy for installation and connecting.




## Feature

- Complies with IEEE 802.11a standard
- Support 64-bit and 128-bit WEP, WPA, WPA2, encryption/decryption and WPA with Radius
- Support Wireless WAN for client mode to connect to the Base-Station and NAT for Ethernet to Computer or Switch
- Support UPnP for automatic Internet access and Dynamic DNS service
- Supports firmware upgrade function via Web
- Power over Ethernet design
- Web base configuration
- Integrated 14dBi dual-polarity antenna
- Operation Mode: WISP, Bridge, Router and Ethernet adapter modes
- Weatherproof IP65 case against rugged environment
- Optional Adjustable L-Mounting kits

## Specification

<b>Standards</b>	<ul style="list-style-type: none"> <li>• IEEE 802.11a</li> <li>• IEEE 802.3, IEEE 802.1x</li> </ul>
<b>Interface</b>	<ul style="list-style-type: none"> <li>• 2* 10/100Mbps RJ-45</li> <li>• Reset button</li> </ul>
<b>Antenna</b>	<ul style="list-style-type: none"> <li>• Integrated 14dBi dual-polarity Antenna</li> </ul>
<b>Frequency Band</b>	<ul style="list-style-type: none"> <li>• 5180 ~ 5825GHz</li> </ul>
<b>Output Power</b>	<ul style="list-style-type: none"> <li>• 802.11a: 29dBm ± 2dBm</li> <li>• 802.11n: 29dBm ± 2dBm</li> </ul>
<b>Receiver Sensitivity</b>	<ul style="list-style-type: none"> <li>• 802.11a: -73dBm @ 54Mbps</li> <li>• 802.11n: -71dBm @ MCS7(20Mhz) -69dBm @ MCS7(40Mhz)</li> </ul>
<b>Data Rate</b>	<ul style="list-style-type: none"> <li>• 802.11n ( 40MHz ): up to 300Mbps</li> <li>• 802.11n ( 20MHz ): up to 144Mbps</li> <li>• 802.11a: 54,48,36,24, 18,12,9,6Mbps</li> </ul>
<b>Operation Mode</b>	<ul style="list-style-type: none"> <li>• AP, Router, WISP, Ethernet adapter</li> </ul>
<b>Security</b>	<ul style="list-style-type: none"> <li>• NAT Firewall with SPI</li> <li>• Access Control</li> <li>• MAC filter</li> <li>• DMZ Host</li> <li>• SSID Broadcast disable</li> <li>• Wireless MAC address Filtering</li> <li>• WEP 64-/128-Bit Encryption</li> <li>• WPA-/W PA2-PSK (Pre-shared Key)</li> <li>• WPA/W PA2 Enterprise mode (802.1x)</li> <li>• WiFi Protected Setup (WPS)</li> </ul>
<b>Software feature</b>	<ul style="list-style-type: none"> <li>• Site Survey</li> <li>• SNMP v1/v2 support</li> <li>• adjustable output power</li> <li>• Distance Adjustment</li> <li>• Radius (802.1x)</li> </ul>
<b>Management</b>	<ul style="list-style-type: none"> <li>• Web-base management interface</li> <li>• Remote management</li> <li>• SNTP time synchronize</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Pole Mount</li> <li>• Adjust Angle Mount (Option)</li> </ul>
<b>Dimension</b>	<ul style="list-style-type: none"> <li>• 282 * 192 * 45mm</li> </ul>
<b>Power Supply</b>	<ul style="list-style-type: none"> <li>• DC24V 750mA PoE Adapter</li> </ul>
<b>Environment</b>	<ul style="list-style-type: none"> <li>• Operating Temperature: -20 ~70°C</li> <li>• Operating Humidity: 0~90% (Non-Condensing)</li> </ul>
<b>Certifications</b>	<ul style="list-style-type: none"> <li>• FCC, CE</li> </ul>

## Application

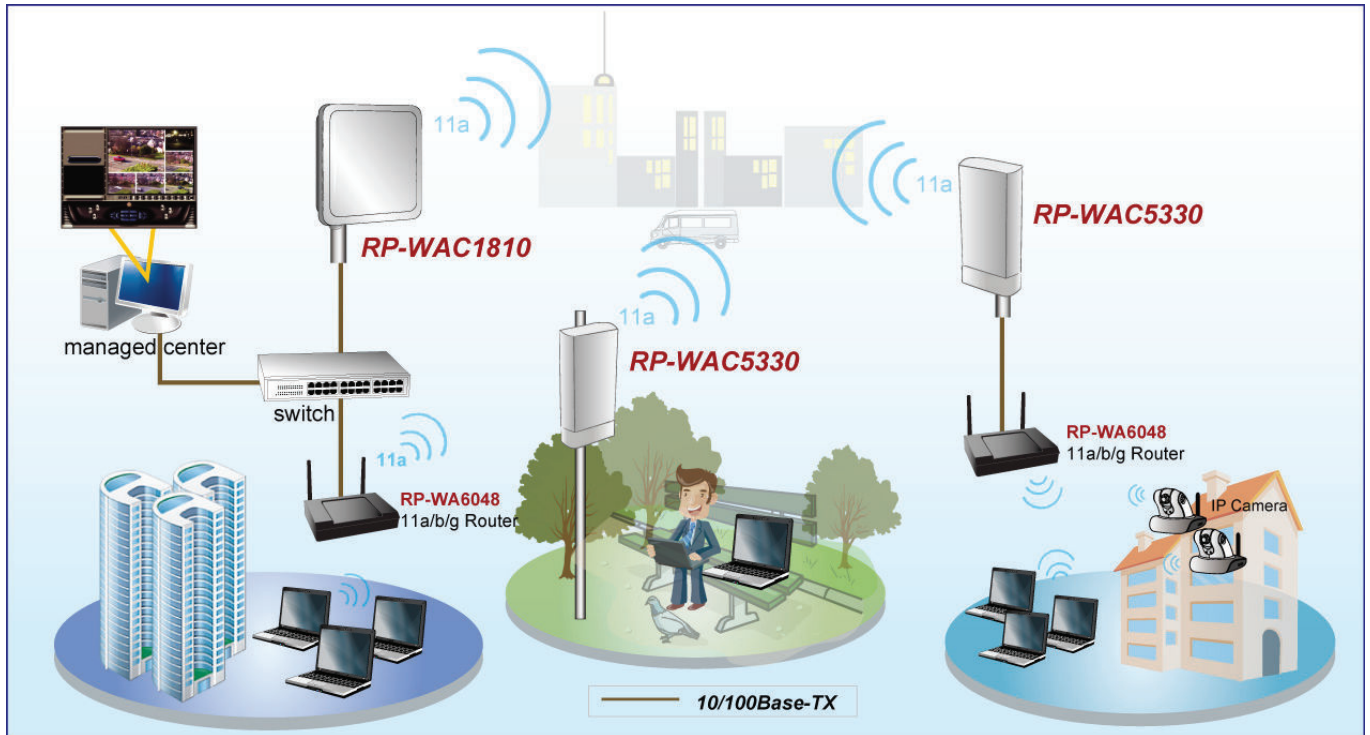

## Ordering information

**RP-WAC5330** Wireless-A/an Outdoor AP/ CPE, 2T2R, 30dBm, integrated 14dBi dual-polarity antenna, w/ Passive PoE

Address : Perpa Ticaret Merkezi, A Blok No.295 Sisli/Istanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telcolink.com

[www.telcolink.com](http://www.telcolink.com)

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

**Quality Link Connections**

