

RP-WAC5422

Wireless-N Outdoor AP/ CPE, Integrated 12dBi dual-polarity antenna

RP-WAC5422 is the outdoor High-Power WISP AP/CPE which designed for connecting wireless communication devices together from the wireless ISP network. It's easy to use and to connecting wireless ISP network with integrated 12dBi dual-polarity antenna, which operates in the 2.4GHz band compliant with IEEE 802.11n and IEEE 802.11b/g Standards. RP-WAC5422 supports data transmission rate is up to 300Mbps in 11n mode. It is the best suited for Enterprises, or off-site locations in request of LAN or Internet access without cabling issues for wired cabling. RP-WAC5422 also support passive PoE allowing easy installation without any environment limitation.




Feature

- Complies with IEEE 802.11n standard
- Support 64-bit and 128-bit WEP, WPA, WPA2, encryption/decryption and WPA with Radius
- Support Wireless WAN for client mode to connect to the Base-Station and NAT for Ethernet to Computer or Switch
- Support UPnP for automatic Internet access and Dynamic DNS service
- Supports firmware upgrade function via Web
- Power over Ethernet design
- Web base configuration
- Integrated 12 dBi 2.4GHz panel antenna
- Operation Mode: AP, Client, WISP, WDS Bridge
- Weather proof IP67 case against rugged environment

Specification

Standards	<ul style="list-style-type: none"> • IEEE 802.11n, IEEE 802.11g, IEEE 802.11b, • IEEE 802.3, IEEE 802.1x
Interface	<ul style="list-style-type: none"> • 2* 10/100Mbps RJ45 Port • Reset button
Antenna	<ul style="list-style-type: none"> • Integrated 12dBi 2.4GHz Panel
Frequency Band	<ul style="list-style-type: none"> • 2.400GHz ~ 2.484GHz
Output Power	<ul style="list-style-type: none"> • 802.11b: 29dBm ± 1.5dBm • 802.11g: 28dBm ± 1.5dBm • 802.11n: 25dBm ± 1.5dBm
Receiver Sensitivity	<ul style="list-style-type: none"> • -90dBm @ 11Mbps • -75dBm @ 54Mbps • -71dBm @ MCS7(20Mhz) • -69dBm @ MCS7(40Mhz)
Data Rate	<ul style="list-style-type: none"> • 802.11n (40MHz): up to 300Mbps • 802.11n (20MHz): up to 144Mbps • 802.11g: 54,48,36,24,18,12,9,6Mbps • 802.11b: 11,5.5,2,1Mbps
Channel	<ul style="list-style-type: none"> • 2.412~2.462GHz (Canada, FCC) -11 Channels • 2.412~2.484GHz (Japan, TELEC) -14 Channels • 2.412~2.472GHz (Euro, ETSI) -13 Channels
Wireless Mode	<ul style="list-style-type: none"> • AP, Router, Client, WISP,
Security	<ul style="list-style-type: none"> • NAT Firewall with SPI • Access Control • MAC filter • DMZ Host • SSID Broadcast disable • Wireless MAC address Filtering • WEP 64-/128-Bit Encryption • WPA-/W PA2-PSK (Pre-shared Key) • WPA/W PA2 Enterprise mode (802.1x) • WiFi Protected Setup (WPS)
Software feature	<ul style="list-style-type: none"> • Site Survey • SNMP v1/v2 support • adjustable output power • Distance Adjustment • Radius (802.1x)
Management	<ul style="list-style-type: none"> • Web-base management interface • Remote management • SNTP time synchronize
Mounting	<ul style="list-style-type: none"> • Pole Mount • Adjust Angle Mount (Option)
Dimension	<ul style="list-style-type: none"> • 282 * 192 * 45mm
Power Supply	<ul style="list-style-type: none"> • DC24V 750mA PoE Adapter
Environment	<ul style="list-style-type: none"> • Operating Temperature: -20 ~70°C • Operating Humidity: 0~90% (Non-Condensing)
Certifications	<ul style="list-style-type: none"> • FCC, CE

Application

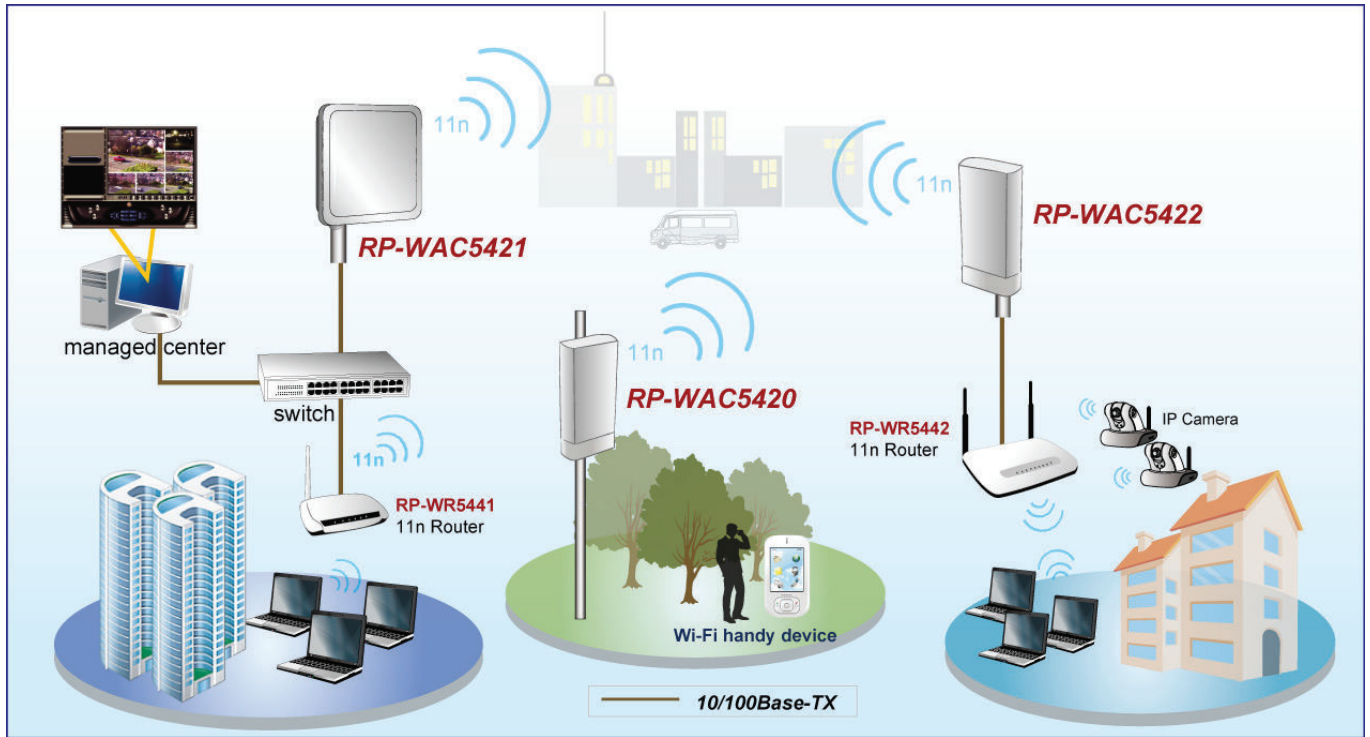

Ordering information

RP-WAC5422 Wireless-N Outdoor AP/ CPE, 2T2R, 30dBm, integrated 12dBi dual-polarity antenna, w/ Passive PoE

Address : Perpa Ticaret Merkezi, A Blok No.295 Sisli/Istanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telkolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

Quality Link Connections

