

RP-WAC5422S

Wireless-N Outdoor AP/ CPE

RP-WAC5422S utilizes advanced Atheros extended Range technology as reliable outdoors AP/CPE solution. It operates in 2.4GHz band compliant with 802.11N/b/g standard and with advance features for outdoor application. The device supports smart software features (RSSI /ACK) to optimized bandwidth in transmission and receiving on long-ranged operation , it supports 4 operation modes of AP, Client, WISP, WDS Bridge (up to 8 WDS maximum). It supports SNMP v1 & v2c network management for WISP.

RP-WAC5422S supports data transmission rate is up to 300Mbps in 11n mode, it is the best suited for Enterprises, or off-site locations in request of LAN or Internet access without cabling issues for wired cabling. It also support passive PoE allowing easy installation without any environment limitation.




Feature

- Complies with IEEE 802.11n standard
- Support 64-bit and 128-bit WEP, WPA, WPA2, encryption/decryption and WPA with Radius
- Support Wireless WAN for client mode to connect to the Base-Station and NAT for Ethernet to Computer or Switch
- Support UPnP for automatic Internet access and Dynamic DNS service
- Supports firmware upgrade function via Web
- Power over Ethernet design
- Web base configuration
- With external 2*N type antenna connector
- Operation Mode: AP, Client, WISP, WDS Bridge
- Weather proof IP67 case against rugged environment

Specification

Standards	<ul style="list-style-type: none"> • IEEE 802.11n, IEEE 802.11g, IEEE 802.11b, • IEEE 802.3, IEEE 802.1x
Interface	<ul style="list-style-type: none"> • 1* 10/100Mbps WAN Port (RJ-45) • 1* 10/100Mbps PoE LAN Port (RJ-45) • 2* N type antenna connector
Frequency Band	<ul style="list-style-type: none"> • 2.400GHz ~ 2.484GHz
Output Power	<ul style="list-style-type: none"> • 802.11b: 29dBm ± 1.5dBm • 802.11g: 28dBm ± 1.5dBm • 802.11n: 25dBm ± 1.5dBm
Receive Sensitivity	<ul style="list-style-type: none"> • -90dBm @ 11Mbps • -75dBm @ 54Mbps • -71dBm @ MCS7(20Mhz) • -69dBm @ MCS7(40Mhz)
Data Rate	<ul style="list-style-type: none"> • 802.11n (40MHz): up to 300Mbps • 802.11n (20MHz): up to 144Mbps • 802.11g: 54,48,36,24, 18,12,9,6Mbps • 802.11b: 11,5.5,2,1Mbps
Channel	<ul style="list-style-type: none"> • 2.412~2.462GHz (Canada, FCC) -11 Channels • 2.412~2.484GHz (Japan, TELEC) -14 Channels • 2.412~2.472GHz (Euro, ETSI) -13 Channels
Wireless Mode	<ul style="list-style-type: none"> • AP, Router, Client, WISP,
Security	<ul style="list-style-type: none"> • NAT Firewall with SPI • Access Control • MAC filter • DMZ Host • SSID Broadcast disable • Wireless MAC address Filtering • WEP 64-/128-Bit Encryption • WPA-/W PA2-PSK (Pre-shared Key) • WPA/W PA2 Enterprise mode (802.1x) • WiFi Protected Setup (WPS)
Software feature	<ul style="list-style-type: none"> • Site Survey • SNMP v1/v2 support • adjustable output power • Distance Adjustment • Radius (802.1x)
Management	<ul style="list-style-type: none"> • Web-base management interface • Remote management • SNTP time synchronize
Mounting	<ul style="list-style-type: none"> • metal mounting kit
Dimension	<ul style="list-style-type: none"> • 282 * 192 * 45mm
Power Supply	<ul style="list-style-type: none"> • DC48V 0.4A PoE injector Adapter
Environment	<ul style="list-style-type: none"> • Operating Temperature: -20 ~70°C • Operating Humidity: 0~90% (Non-Condensing)

Application

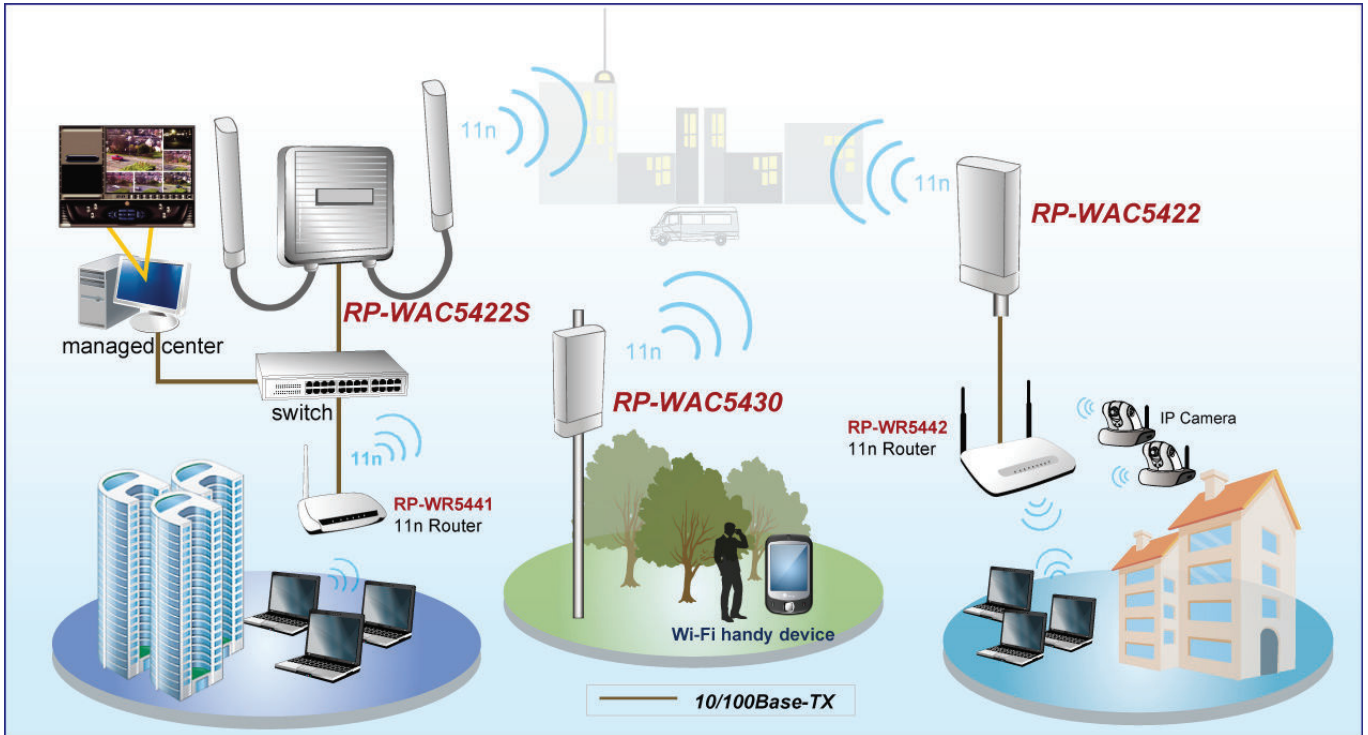

Ordering information

RP-WAC5422S Wireless-N Outdoor AP/ CPE

Address : Perpa Ticaret Merkezi, A Blok No.295 Sisli/Istanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telcolink.com

www.telcolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

Quality Link Connections

