

SDH STM-1 Service Platform



1.Overview

F10-155S is a STM-1 optical transmission system, whose technical performances are fully complied with ITU-T and SDH recommendations. This system is benefit of high integration, flexible construction and strong network adaptability, etc. F10-155S provides two 155.52Mb/s aggregate line interfaces of A and B, possessing the network elements timing function of ITU-T G.813 recommendation, and VC-12 full-crossing connection and channel protection function. F10-155S has the following usages:

As an ADM, it can be inserted in STM-1 ring which provide $32 \times E1\lambda$ tributaries;

As a terminal, it can multiplex $32 \times E1$ to a line λ port;

Network element management of F10-155S system is based on unified network management platform Fi-View-SDH. Fi-View-SDH is designed in accordance with related recommendations of ITU-T, so as to realize network resources, equipment configuration, alarm, performance and security management; it can support unified management of multiple optical-route non-interconnected sub-net, and support remote network monitoring by way of Internet.

2.Features

World leading design adopts independent Asics, with 1U single-board structure, compactness, high reliability, low power consumption;

Provides 63 X 63 VC12 non-blocking cross-connect, supports tributaries Add/Drop of 1~63 E1, with capability of unidirectional and bi-directional multiplexing;

Supports network of point to point, chain and ring, providing functions like tributaries 1+1 channel protection, etc.;

Can realize independent service-assignment or mutual protection between two optical interfaces, and can build (connected with F10-155C) various complex networks of STM-1 multi-ring, and multi-branch, etc.;

Provides timing synchronous interface, implements switching of multiple timing sources like 2Mb/s, 2MHz, STM-1, etc., and output of 2Mb/s, 2MHz reference clock.

Provides multiple service interfaces of E1, 10/100M Ethernet, RS232, V.35,etc.

Ethernet access support Link Capacity Adjustment Scheme(LCAS) for dynamic bandwidth management;

Provides Engineer Order Wire (EOW) interface (two-line model), with group call and dial functions;

Provides D1-D3 ECC channel, network management adopting TCP/IP communication protocol;

Provides F (Ethernet) and f (RS232) NMS interface, network management platform Fi-View-SDH can realize ITU-T recommendations five functions of resources, configuration, alarm, performance, and security, etc.;

Network management platform Fi-View-SDH can realize software remote downloading, with software live-upgrading capability, being easy to maintain, can realize remote monitoring;

Through replacing optical devices, supports ultra-long distance ($\leq 80\text{km}$), long distance ($\leq 50\text{km}$) and short distance ($\leq 30\text{km}$) optical transmission;

Equipment adopts natural wind heat emission, with stable and reliable work.


Below is only for Chassis (F10-155C)

4U height Chassis is made up of Element Management Unit(EMU), Cross-Connect and CLK Card,Optical Card, E1 mapping Card and Ethernet mapping card,


4-optical-port, STM-1 MADM or TM multiplexer;
Support up to 126 E1-circuit add/drop;
Support up to 32 10/100Base-T;
Support cross connection of all VC12 ;

3. Typical Application

Ring Topology

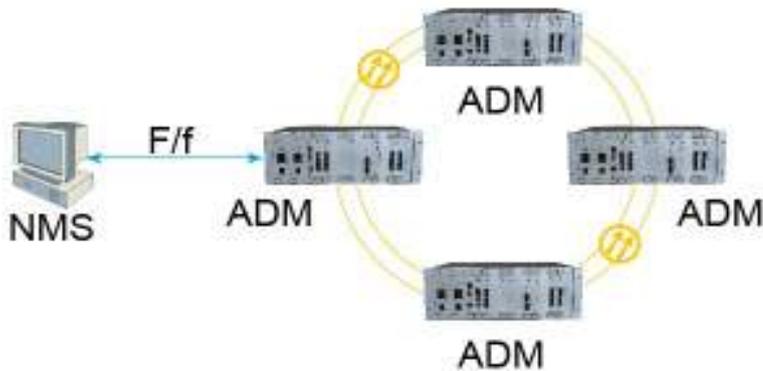

Tree / Chain topology

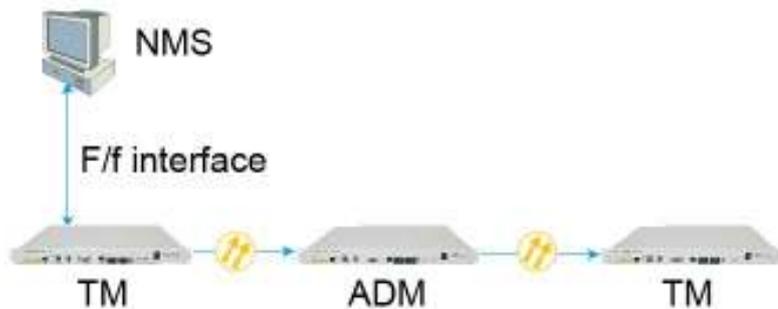

4. Specification

Mechanical dimensions

Dimensions: 293 (D) x 434 (W) x 44 (H) mm

Weight: 4.0Kg

Environmental requirements

Power supply: -48 VDC \pm 10% or
180-265VAC

Fully equipment power consumption: 25W \pm 10%

Operating temperature: 0°C~45°C

Humidity: \leq 90% (free from condensing)

Atmospheric pressure: 70~106 Kappa

Storage temperature: -20°C ~70°C

STM-1 optical interface

Bit Rate 155.520Mb/s \pm 4.6ppm

Standard ITU-T G.957/G.958

wavelength 1310nm /1550nm

Distance 50Km

Sensitivity Better than -36dB

Connector FC/SC

E1 interface

Bit Rate 2.048Mb/s \pm 50ppm

Encoding HDB3
Standard ITU-T G.703
Connector 2mm high density connector
Impedance 75Ω/120Ω
Jitter performance Comply ITU-T G. 823

Ethernet interface

Compatible with 10/100Base-T
Connector: RJ45

External timing source interface (REF)

Standard ITU-T G.813/783
Input T1, T3
Output T4
Working mode: tracing, holding & free run
Interface Micro-mini coaxial

Engineer Order Wire (EOW) interface

Bit Rate 64Kb/s
Signal mode Dual tone multi-frequency dialing mode
Ring frequency 450Hz
Ring mode Buzzer
NE address range 00~99

Serial NMU (RS-232) interface

Bit Rate 115200b/s
Interface DB9

Ethernet NMU (RJ-45) interface

Bit Rate 10/100M
Mode Full/half duplex auto-negotiation
Interface RJ-45

5.Order Information

Part Number

F10-155S16-S042F43 :16E1, four 10/100Mbps Ethernet, 40km, FC/PC, 1310nm
F10-155S16-S042F :16E1, without Ethernet, 40km, FC/PC, 1310nm
F10-155S24-S042F43A :24E1, four 10/100Mbps Ethernet, 40km, FC/PC, 1310nm, AC220V
F10-155S32-S042FD :32E1, without Ethernet, 40km, FC/PC, 1310nm, DC-48V

F10-155S63 :Standalone STM-1 63E1

Address : Perpa Ticaret Merkezi, A Blok No.516 Şişli/İstanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telcolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

Haberleşme sistemlerinde yüksek performansı yakalayın

