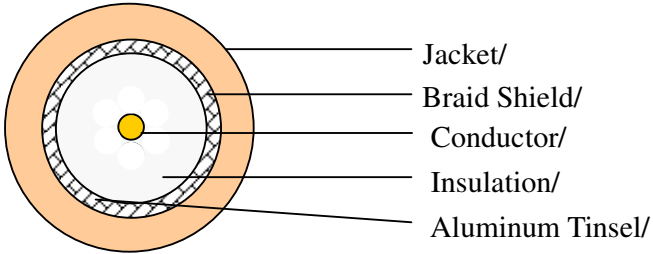


SPECIFICATION LMR100

	Low Loss cable		
	LMR100		
Standard :			
Conductor/	Material/	----	BC
	Conductors No./	----	1
	Construction Size/	mm	0.45 ± 0.003
	Stranded Diameter/	mm	0.45
Insulation/	Material/	----	PE
	Color/	----	Clear
	Average Thickness/	mm	0.53
	Diameter/	mm	1.50 ± 0.05
Tape/	Material/	----	Aluminum Tinsel/ 0.05*5.0mm
Braid Shield/	Material/	----	TC
	Construction/	mm	16/5/0.1
	Coverage/	%	95
	Diameter/	mm	2.04~2.13
Jacket/	Material/	----	PVC
	Color/	----	Black/
	Average Thickness/	mm	0.38
	Overall Diameter/	mm	2.75 ± 0,1
Marking/			
Drawing/			

Satis : yusuf@telkolink.com

Teknik Destek : sait@telkolink.com

Tel : 0(212) 320 4030 & 0(212) 320 0255

Mobile : 0(554) 739 5700 & 0(533) 426 6695

Adres : Perpa Ticaret Merkezi A Blok K.6 No:516 Okmeydani