

RP-1000SC | RP-1000C1 |

RP-1000C2

1000Base-T to 1000Base-SX/LX Smart Gigabit Media Converter



The media converters support two types of media for network connection such as 1000Base-T and 1000Base-SX/LX. The device is designed to connect these two types of segments to operate smoothly, the simplest way to interconnect any equipment's 1000Base-T port to the 1000Base-SX/LX interface networks for extended distance coverage.

Feature

- Compliant with IEEE 802.3ab 1000Base-T, IEEE802.3z 1000Base-SX/LX Gigabit Ethernet Standards
- Provides one 1000Base-T port, one 1000Base-SX/LX port supporting either multi-mode or single-mode fiber up to 20Km
- Supports Full Duplex and Auto-negotiation mode for Fiber port
- Front panel diagnostic LED indications
- Support LLCF (Link Loss Carry Forward, Link Pass Through)
- Support LLR (Link Loss Return) for Fiber port
- Provides 19" system chassis for up to 16-converter with Redundant Power Supply for optional expansion use


Management Features

- Supports LLCF (Link Loss Carry Forward, Link Pass Through)
- Supports LLR (Link Loss Return) for FX port
- Monitor the status of duplex/link for both media via management module MOD-MCSNMP through Media Converter hassis System (RP-MCR116)
- Set duplex force, LLCF on/off, LLR on/off for FX, ports on/off via the MOD-MCSNMP through RP-MCR116
- Provides link down source port information

Specification

Standards		<ul style="list-style-type: none"> IEEE 802.3ab 1000Base-T IEEE 802.3z 1000Base-SX IEEE 802.3z 1000Base-LX
Interface		<ul style="list-style-type: none"> 1*1000Base-T with RJ45 connector 1*1000Base-SX/LX with SC connector
Media Support	1000Base-T	<ul style="list-style-type: none"> 4 pair Cat.5e or higher, EIA/TIA-568 100-ohm twisted-pair cable, up to 100m
	1000Base-SX	<ul style="list-style-type: none"> 50/125µm multi-mode fiber optic cable, up to 550m
	1000Base-LX	<ul style="list-style-type: none"> 9/125µm or 10/125µm single-mode fiber optic cable, up to 20km
Protocol		<ul style="list-style-type: none"> CSMA/CD
Ports		<ul style="list-style-type: none"> 1 * 1000Base-T with RJ-45 connector 1 * 1000Base-SX/LX with SC connector
Data Transfer Rate		<ul style="list-style-type: none"> 2000Mbps (Full Duplex)
Dip Switch		<ul style="list-style-type: none"> Auto-negotiation or Manual for FX LLR enable or disable for FX
LED Indicators		<ul style="list-style-type: none"> Per unit: Power Per port: Link/Activity
Power Consumption		<ul style="list-style-type: none"> 2.7W
Power Supply		<ul style="list-style-type: none"> External power Adapter DC 5V/1A
Environment		<ul style="list-style-type: none"> Operating Temperature: 0°C~40°C Operating Humidity: 10%~90%
Dimension		<ul style="list-style-type: none"> 120 * 88 * 25 mm
Certification		<ul style="list-style-type: none"> FCC, CE

Application

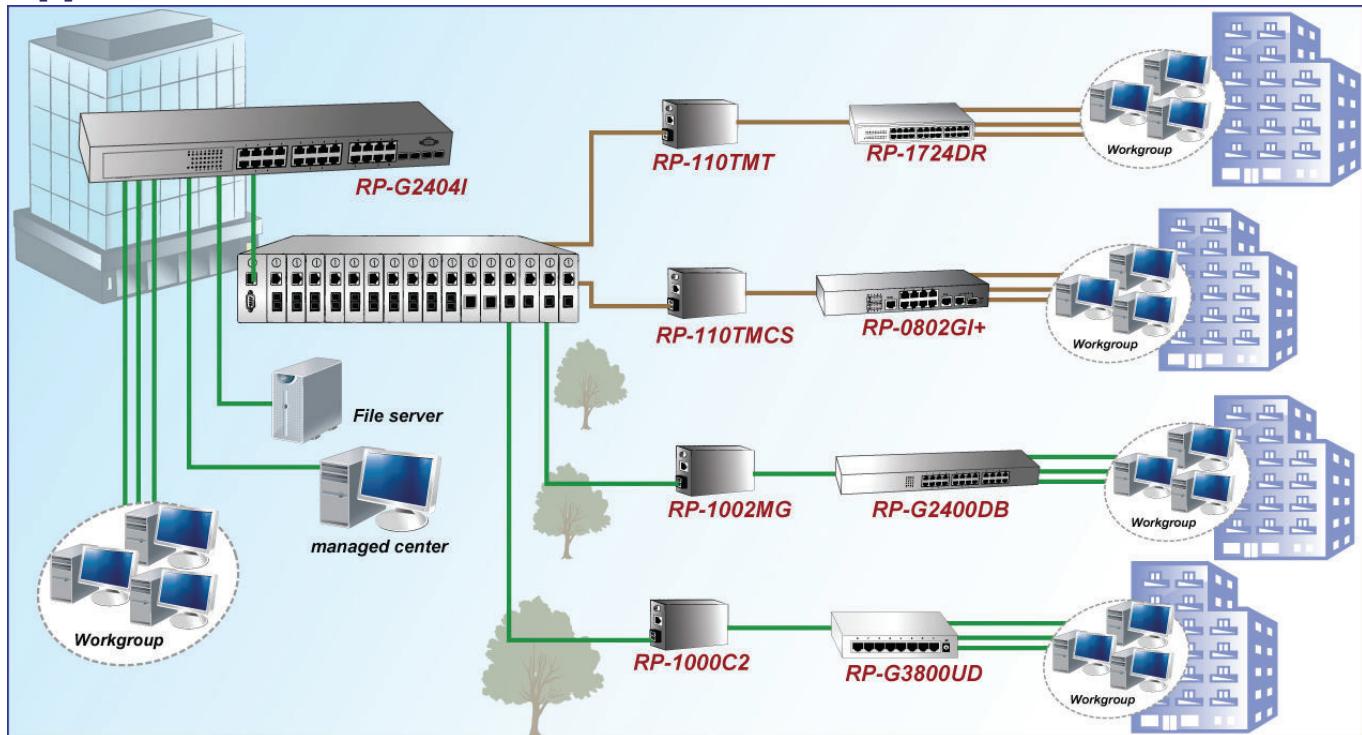

Ordering information

RP-1000SC	1000Base-T to SX Smart Gigabit Media Converter, MM/SC
RP-1000C1	1000Base-T to LX Smart Gigabit Media Converter, SM/10 Km
RP-1000C2	1000Base-T to LX Smart Gigabit Media Converter, SM/20 Km

Address : Perpa Ticaret Merkezi, A Blok No.295 Sisli/Istanbul | Tel : +90 212 3204030 | Fax : +90212 3200255 | e-mail : info@telkolink.com

www.telkolink.com

© 2009 telkolink Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000175 Rev. C

Quality Link Connections

