

SC Optical Fibre Adaptors

V.3.1

Description

a range of high quality SC adaptors which have high precision alignment sleeves for reliability and improved reconnectability. For singlemode applications a ceramic sleeve is supplied to ensure a high precision alignment. For multimode applications a phosphor bronze sleeve is supplied. The housing is available in different colours with options for flange or flangeless body, metal clips or inbuilt clips

Features


- ▶ Complies with IEC 61754-4 and IEC 60784-14 standards
- ▶ High precision alignment sleeve
- ▶ Low insertion loss and improved reconnectability
- ▶ RoHS, REACH SvHC compliant
- ▶ Available in simplex and duplex adaptors
- ▶ SC simplex adaptors are available with a shutter

Applications

- ▶ Data centres, premise installations, telecommunication networks
- ▶ Ethernet, fibre channel, ATM, LAN, MAN and WAN

Technical Specification

	CERAMIC	PHOSPHOR BRONZE	CONFORMANCE
Insertion Loss (Typ)	0.1 dB	0.15 dB	IEC 61300-3-4
Mating Durability	-	500	IEC 61300-2-2
Receptacle Retention force	-	2N - 5.9N	IEC 61754-4
Operating temperature	-	-25 to +70, 12 cycles	IEC 61300-2-22

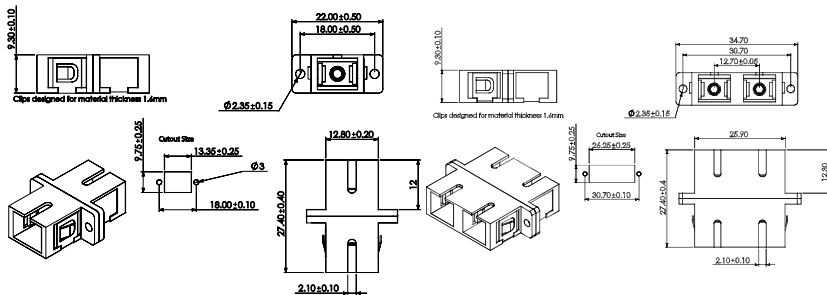

İletişim Bilgilerimiz

Satış : yusuf@telkolink.com
 Teknik Destek : sait@telkolink.com
 Tel : 0(212) 320 4030 & 0(212) 320 0255
 Mobile : 0(554) 739 5700 & 0(533) 426 6695
 Adres : Perpa Ticaret Merkezi A Blok K.6 No:516 Okmeydanı Şişli İstanbul

